




Product Specification

M190PW01 V80E/80F

AU OPTRONICS CORPORATION



() Preliminary Specification

(V) Final Specification

Module	19"W Color TFT-LCD
Model Name	M190PW01 V80E/80F

<table><tr><td>Customer</td><td>Date</td></tr><tr><td>_____</td><td>_____</td></tr><tr><td>Approved by</td><td></td></tr><tr><td>_____</td><td>_____</td></tr></table>	Customer	Date	_____	_____	Approved by		_____	_____	<table><tr><td>Approved by</td><td>Date</td></tr><tr><td><u>Howard Lee</u></td><td><u>Mar 13, 2014</u></td></tr><tr><td>Prepared by</td><td>Date</td></tr><tr><td><u>Amy Wu</u></td><td><u>Mar 13, 2014</u></td></tr></table>	Approved by	Date	<u>Howard Lee</u>	<u>Mar 13, 2014</u>	Prepared by	Date	<u>Amy Wu</u>	<u>Mar 13, 2014</u>
Customer	Date																
_____	_____																
Approved by																	
_____	_____																
Approved by	Date																
<u>Howard Lee</u>	<u>Mar 13, 2014</u>																
Prepared by	Date																
<u>Amy Wu</u>	<u>Mar 13, 2014</u>																
Note: This Specification is subject to change without notice.	AU Optronics corporation																



Product Specification

M190PW01 V80E/80F

AU OPTRONICS CORPORATION

Contents

1 Handling Precautions.....	4
2 General Description	5
2.1 Display Characteristics.....	5
2.2 Absolute Maximum Rating of Environment	6
2.3 Optical Characteristics	7
3 TFT-LCD Module	11
3.1 Block Diagram.....	11
3.2 Interface Connection.....	12
3.2.1 Connector Type.....	12
3.2.2 Connector Pin Assignment.....	12
3.3 Electrical Characteristics.....	14
3.3.1 Absolute Maximum Rating	14
3.3.2 Recommended Operating Condition.....	14
3.4 Signal Characteristics	15
3.4.1 LCD Pixel Format.....	15
3.4.2 LVDS Data Format.....	15
3.4.3 Color versus Input Data	16
3.4.4 LVDS Specification.....	17
3.4.5 Input Timing Specification	19
3.4.6 Input Timing Diagram.....	20
3.5 Power ON/OFF Sequence	21
4 Backlight Unit.....	22
4.1 Block Diagram.....	22
4.2 Interface Connection.....	23
4.2.1 Connector Type.....	23
4.2.2 Connector Pin Assignment.....	25
4.3 Electrical Characteristics.....	26
4.3.1 Absolute Maximum Rating	26
4.3.2 Recommended Operating Condition.....	26
5 Reliability Test.....	28
6 Shipping Label.....	29
7 Mechanical Characteristics.....	30
8 Packing Specification.....	31
8.1 Packing Flow.....	31
8.2 Pallet and shipment information.....	32



Product Specification

M190PW01 V80E/80F

AU OPTRONICS CORPORATION

Record of Revision

Version	Date	Page	Old description	New Description	Remark																																																																																																																																																														
1.0	2014/3/3	All	First version release	-																																																																																																																																																															
1.1	2014/3/13	19	3.4.5 Input Timing specification<table><thead><tr><th>Symbol</th><th>Description</th><th>Min.</th><th>Typ.</th><th>Max.</th><th>Unit</th><th>Remark</th></tr></thead><tbody><tr><td>V_{cc}</td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>$T_{dss}(V)$</td><td rowspan="3">Vertical Section</td><td>Period</td><td>912</td><td>916</td><td>1661</td><td>ns</td></tr><tr><td>$T_{bls}(V)$</td><td>Active</td><td>900</td><td>900</td><td>900</td><td>ns</td></tr><tr><td>$T_{bls}(V)$</td><td>Blanking</td><td>12</td><td>16</td><td>781</td><td>ns</td></tr><tr><td>F_{vs}</td><td></td><td>Frequency</td><td>813</td><td>864</td><td>1472</td><td>Hz</td></tr><tr><td>T_{hs}</td><td rowspan="3">Horizontal Section</td><td>Period</td><td>720</td><td>720</td><td>720</td><td>ns</td></tr><tr><td>$T_{dss}(H)$</td><td>Active</td><td>35</td><td>244</td><td>762</td><td>ns</td></tr><tr><td>$T_{bls}(H)$</td><td>Blanking</td><td>119</td><td>189</td><td>270</td><td>ns</td></tr><tr><td>F_{hs}</td><td></td><td>Frequency</td><td>37.1</td><td>53.0</td><td>87.1</td><td>KHz</td></tr><tr><td>T_{clk}</td><td rowspan="2">LVDS Clock</td><td>Period</td><td>40</td><td>60</td><td>76</td><td>ns</td></tr><tr><td>F_{clk}</td><td>Frequency</td><td>45.6</td><td>85.0</td><td>82.6</td><td>MHz</td></tr></tbody></table>	Symbol	Description	Min.	Typ.	Max.	Unit	Remark	V_{cc}							$T_{dss}(V)$	Vertical Section	Period	912	916	1661	ns	$T_{bls}(V)$	Active	900	900	900	ns	$T_{bls}(V)$	Blanking	12	16	781	ns	F_{vs}		Frequency	813	864	1472	Hz	T_{hs}	Horizontal Section	Period	720	720	720	ns	$T_{dss}(H)$	Active	35	244	762	ns	$T_{bls}(H)$	Blanking	119	189	270	ns	F_{hs}		Frequency	37.1	53.0	87.1	KHz	T_{clk}	LVDS Clock	Period	40	60	76	ns	F_{clk}	Frequency	45.6	85.0	82.6	MHz	3.4.5 Input Timing specification<table><thead><tr><th>Symbol</th><th>Description</th><th>Min.</th><th>Typ.</th><th>Max.</th><th>Unit</th><th>Remark</th></tr></thead><tbody><tr><td>V_{cc}</td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>$T_{dss}(V)$</td><td rowspan="3">Vertical Section</td><td>Period</td><td>914</td><td>916</td><td>1801</td><td>ns</td></tr><tr><td>$T_{bls}(V)$</td><td>Active</td><td>900</td><td>900</td><td>900</td><td>ns</td></tr><tr><td>$T_{bls}(V)$</td><td>Blanking</td><td>14</td><td>6</td><td>801</td><td>ns</td></tr><tr><td>F_{vs}</td><td></td><td>Frequency</td><td>49</td><td>80</td><td>76</td><td>Hz</td></tr><tr><td>T_{hs}</td><td rowspan="3">Horizontal Section</td><td>Period</td><td>760</td><td>964</td><td>1408</td><td>ns</td></tr><tr><td>$T_{dss}(H)$</td><td>Active</td><td>730</td><td>720</td><td>720</td><td>ns</td></tr><tr><td>$T_{bls}(H)$</td><td>Blanking</td><td>40</td><td>244</td><td>778</td><td>ns</td></tr><tr><td>F_{hs}</td><td></td><td>Frequency</td><td>44.9</td><td>55.3</td><td>88.2</td><td>KHz</td></tr><tr><td>T_{clk}</td><td rowspan="2">LVDS Clock</td><td>Period</td><td>15.0</td><td>18.3</td><td>29.3</td><td>ns</td></tr><tr><td>F_{clk}</td><td>Frequency</td><td>34</td><td>63.3</td><td>67.1</td><td>VI Z</td></tr></tbody></table>	Symbol	Description	Min.	Typ.	Max.	Unit	Remark	V_{cc}							$T_{dss}(V)$	Vertical Section	Period	914	916	1801	ns	$T_{bls}(V)$	Active	900	900	900	ns	$T_{bls}(V)$	Blanking	14	6	801	ns	F_{vs}		Frequency	49	80	76	Hz	T_{hs}	Horizontal Section	Period	760	964	1408	ns	$T_{dss}(H)$	Active	730	720	720	ns	$T_{bls}(H)$	Blanking	40	244	778	ns	F_{hs}		Frequency	44.9	55.3	88.2	KHz	T_{clk}	LVDS Clock	Period	15.0	18.3	29.3	ns	F_{clk}	Frequency	34	63.3	67.1	VI Z	
Symbol	Description	Min.	Typ.	Max.	Unit	Remark																																																																																																																																																													
V_{cc}																																																																																																																																																																			
$T_{dss}(V)$	Vertical Section	Period	912	916	1661	ns																																																																																																																																																													
$T_{bls}(V)$		Active	900	900	900	ns																																																																																																																																																													
$T_{bls}(V)$		Blanking	12	16	781	ns																																																																																																																																																													
F_{vs}		Frequency	813	864	1472	Hz																																																																																																																																																													
T_{hs}	Horizontal Section	Period	720	720	720	ns																																																																																																																																																													
$T_{dss}(H)$		Active	35	244	762	ns																																																																																																																																																													
$T_{bls}(H)$		Blanking	119	189	270	ns																																																																																																																																																													
F_{hs}		Frequency	37.1	53.0	87.1	KHz																																																																																																																																																													
T_{clk}	LVDS Clock	Period	40	60	76	ns																																																																																																																																																													
F_{clk}		Frequency	45.6	85.0	82.6	MHz																																																																																																																																																													
Symbol	Description	Min.	Typ.	Max.	Unit	Remark																																																																																																																																																													
V_{cc}																																																																																																																																																																			
$T_{dss}(V)$	Vertical Section	Period	914	916	1801	ns																																																																																																																																																													
$T_{bls}(V)$		Active	900	900	900	ns																																																																																																																																																													
$T_{bls}(V)$		Blanking	14	6	801	ns																																																																																																																																																													
F_{vs}		Frequency	49	80	76	Hz																																																																																																																																																													
T_{hs}	Horizontal Section	Period	760	964	1408	ns																																																																																																																																																													
$T_{dss}(H)$		Active	730	720	720	ns																																																																																																																																																													
$T_{bls}(H)$		Blanking	40	244	778	ns																																																																																																																																																													
F_{hs}		Frequency	44.9	55.3	88.2	KHz																																																																																																																																																													
T_{clk}	LVDS Clock	Period	15.0	18.3	29.3	ns																																																																																																																																																													
F_{clk}		Frequency	34	63.3	67.1	VI Z																																																																																																																																																													



1 Handling Precautions

- 1) Since front polarizer is easily damaged, pay attention not to scratch it.
- 2) Be sure to turn off power supply when inserting or disconnecting from input connector.
- 3) Wipe off water drop immediately. Long contact with water may cause discoloration or spots.
- 4) When the panel surface is soiled, wipe it with absorbent cotton or other soft cloth.
- 5) Since the panel is made of glass, it may break or crack if dropped or bumped on hard surface.
- 6) Since CMOS LSI is used in this module, take care of static electricity and insure human earth when handling.
- 7) Do not open or modify the Module Assembly.
- 8) Do not press the reflector sheet at the back of the module to any directions.
- 9) In case a TFT-LCD Module has to be put back into the packing container slot after once it was taken out from the container, do not press the center of the LED lightbar edge. Otherwise the TFT-LCD Module may be damaged.
- 10) Insert or pull out the interface connector, be sure not to rotate nor tilt it of the TFT-LCD Module.
- 11) Do not twist nor bend the TFT -LCD Module even momentary. It should be taken into consideration that no bending/twisting forces are applied to the TFT-LCD Module from outside. Otherwise the TFT-LCD Module may be damaged.
- 12) Please avoid touching COF position while you are doing mechanical design.
- 13) When storing modules as spares for a long time, the following precaution is necessary:
Store them in a dark place. Do not expose the module to sunlight or fluorescent light. Keep the temperature between 5°C and 35°C at normal humidity.



Product Specification

M190PW01 V80E/80F

AU OPTRONICS CORPORATION

2 General Description

This specification applies to the 19 inch wide Color a-Si TFT-LCD Module M190PW01 V80E/80F. The display supports the WXGA⁺ - 1440(H) x 900(V) screen format and 16.7M colors (8bits RGB data input). The input interface is Dual channel LVDS and this module doesn't contain an driver board for backlight.

2.1 Display Characteristics

The following items are characteristics summary on the table under 25°C condition:

ITEMS	Unit	SPECIFICATIONS
Screen Diagonal	[mm]	481.42 (18.95")
Active Area	[mm]	408.24 (H) x 255.15 (V)
Pixels H x V	-	1440(x3) x 900
Pixel Pitch	[um]	283.50 (per one triad) ×283.50
Pixel Arrangement	-	R.G.B. Vertical Stripe
Display Mode	-	TN Mode, Normally White
White Luminance (Center)	[cd/m ²]	250 (Typ.)
Contrast Ratio	-	1000 (Typ.)
Response Time	[msec]	5 (Typ., on/off)
Power Consumption (LCD Module + Backligh unit)	[Watt]	10.4 (Typ.) LCD module : PDD (Typ.)= 2.0 @ Black pattern,Fv=60Hz Backlight unit : P _{BLU} (Typ.) =8.4@Is=60mA
Weight	[Grams]	1520 (Typ)
Outline Dimension	[mm]	428.0(H) × 278.0(V) × 10.3(D) Typ.
Electrical Interface	-	Dual channel LVDS (8bits RGB data input)
Support Color	-	16.7M colors
Surface Treatment	-	Anti-Glare, 3H
Temperature Range		
Operating	[°C]	0 to +50
Storage (Shipping)	[°C]	-20 to +60
RoHS Compliance	-	RoHS Compliance
TCO Compliance	-	TCO 6.0 Compliance



Product Specification

M190PW01 V80E/80F

AU OPTRONICS CORPORATION


2.2 Absolute Maximum Rating of Environment

Permanent damage may occur if exceeding the following maximum rating.

Symbol	Description	Min.	Max.	Unit	Remark
TOP	Operating Temperature	0	+50	[°C]	Note 2-1
TGS	Glass surface temperature (operation)	0	+65	[°C]	Note 2-1 Function judged only
HOP	Operation Humidity	5	90	[%RH]	Note 2-1
TST	Storage Temperature	-20	+60	[°C]	
HST	Storage Humidity	5	90	[%RH]	

Note 2-1: Temperature and relative humidity range are shown as the below figure.

1. 90% RH Max ($T_a \leq 39^\circ\text{C}$)
2. Max wet-bulb temperature at 39°C or less. ($T_a \leq 39^\circ\text{C}$)
3. No condensation

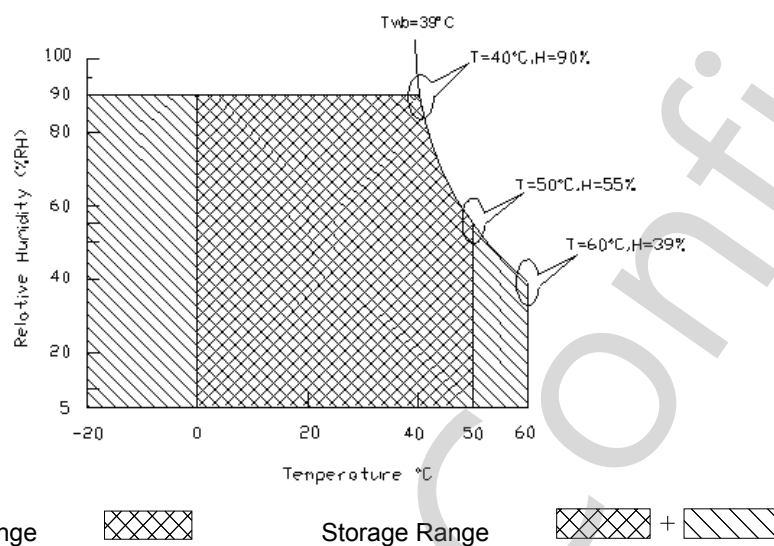



Product Specification

M190PW01 V80E/80F

AU OPTRONICS CORPORATION

2.3 Optical Characteristics

The optical characteristics are measured on the following test condition.

Test Condition:

1. Equipment setup: Please refer to **Note 2-2**.
2. Panel Lighting time: 30 minutes
3. VDD=5.0V, Fv=60Hz, Is=60mA, Ta=25°C

Symbol	Description		Min.	Typ.	Max.	Unit	Remark
L_w	White Luminance (Center of screen)		200	250	-	[cd/m ²]	Note 2-2 By SR-3
L_{uni}	Luminance Uniformity (9 points)		75	80	-	[%]	Note 2-3 By SR-3
CR	Contrast Ratio (Center of screen)		600	1000	-	-	Note 2-4 By SR-3
θ_R	Horizontal Viewing Angle (CR=10)	Right	75	85	-	[degree]	Note 2-5 By SR-3
θ_L		Left	75	85	-		
Φ_H	Vertical Viewing Angle (CR=10)	Up	70	80	-		
Φ_L		Down	70	80	-		
θ_R	Horizontal Viewing Angle (CR=5)	Right	75	88	-		
θ_L		Left	75	88	-		
Φ_H	Vertical Viewing Angle (CR=5)	Up	70	85	-	[msec]	Note 2-6 By TRD-100
Φ_L		Down	70	85	-		
T_R	Response Time	Rising Time	-	3.5	5.5		
T_F		Falling Time	-	1.5	2.5	-	By SR-3
-		Rising + Falling	-	5	8		
R_x	Color Coordinates (CIE 1931)	Red x	0.615	0.645	0.675		
R_y		Red y	0.314	0.344	0.374		
G_x		Green x	0.292	0.322	0.352		
G_y		Green y	0.604	0.634	0.664		
B_x		Blue x	0.124	0.154	0.184		
B_y		Blue y	0.020	0.050	0.080		
W_x		White x	0.283	0.313	0.343		
W_y		White y	0.299	0.329	0.359		
CT	Crosstalk		-	-	1.5	[%]	Note 2-7 By SR-3
F_{dB}	Flicker (Center of screen)		-	-	-20	[dB]	Note 2-8 By SR-3




Product Specification

M190PW01 V80E/80F

AU OPTRONICS CORPORATION

Note 2-2: Equipment setup :

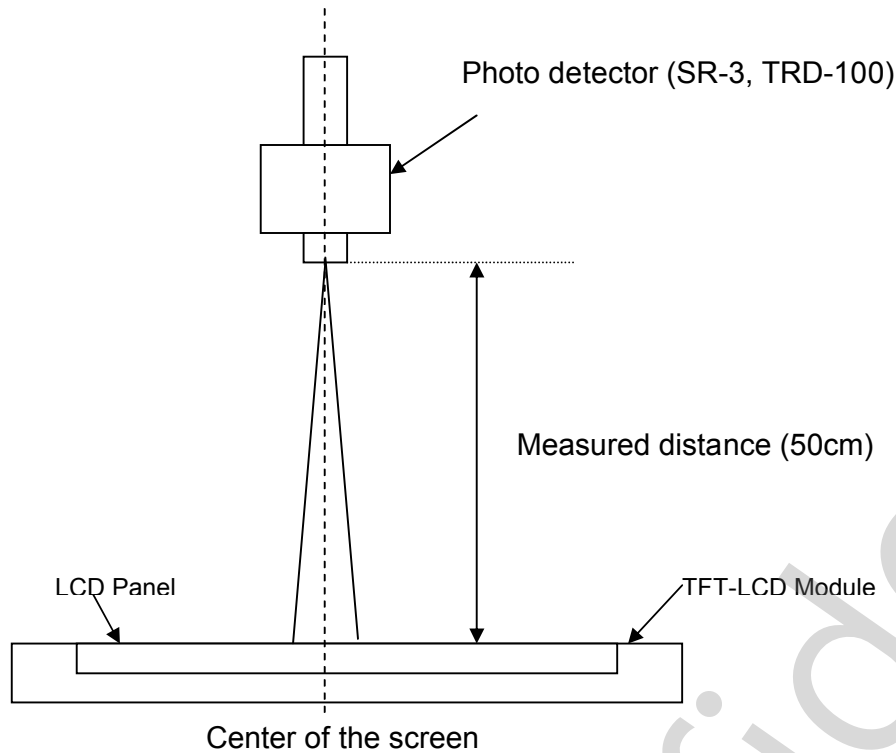


Note 2-3: Luminance Uniformity Measurement

Definition:

$$\text{Luminance Uniformity} = \frac{\text{Minimum Luminance of 9 Points (P1 ~ P9)}}{\text{Maximum Luminance of 9 Points (P1 ~ P9)}}$$

a. Test pattern: White Pattern

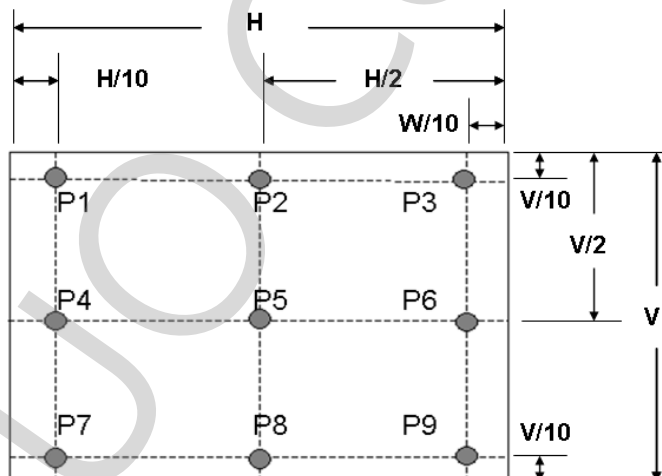



Product Specification

M190PW01 V80E/80F

AU OPTRONICS CORPORATION

Note 2-4: Contrast Ratio Measurement

Definition:

$$\text{Contrast Ratio} = \frac{\text{Luminance of White pattern}}{\text{Luminance of Black pattern}}$$


- a. Measured position: Center of screen (P5) & perpendicular to the screen ($\theta = \Phi = 0^\circ$)

Note 2-5: Viewing angle measurement

Definition: The angle at which the contrast ratio is greater than 10 & 5 .


- a. Horizontal view angle: Divide to left & right (θ_L & θ_R)

Vertical view angle: Divide to up & down (Φ_H & Φ_L)

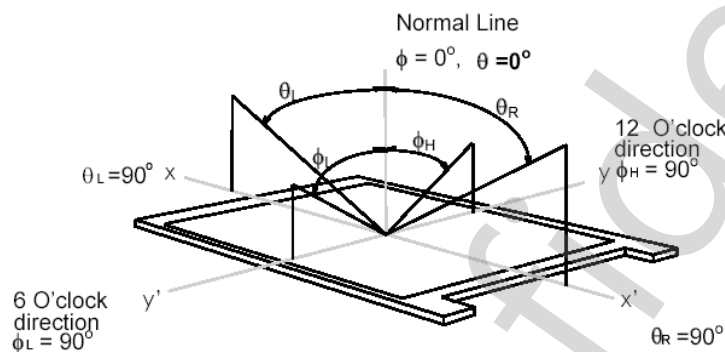

Note 2-6: Response time measurement

The output signals of photo detector are measured when the input signals are changed from “Black” to “White” (rising time, T_R), and from “White” to “Black” (falling time, T_F), respectively. The response time is interval between the 10% and 90% of optical response. (Black & White color definition: Please refer section 3.4.3)

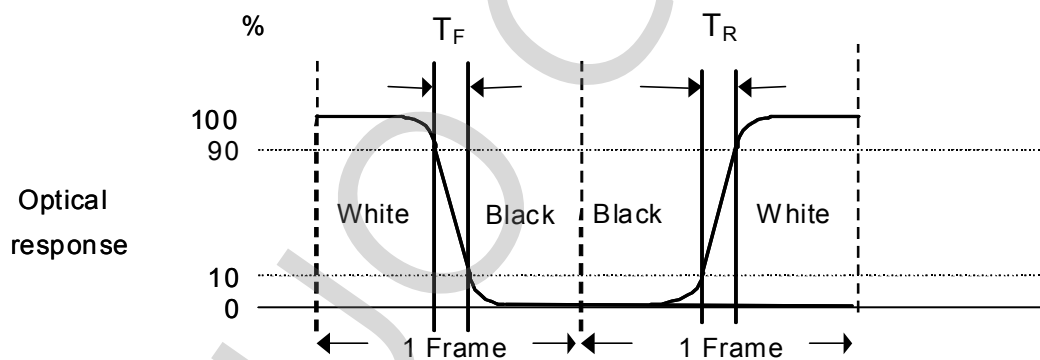

**Note 2-7: Crosstalk measurement****Definition:**

$$CT = \text{Max. } (CT_H, CT_V);$$

Where

a. Maximum Horizontal Crosstalk :


$$CT_H = \text{Max. } (|Y_{BL} - Y_{AL}| / Y_{AL} \times 100\%, |Y_{BR} - Y_{AR}| / Y_{AR} \times 100\%);$$

Maximum Vertical Crosstalk:


$$CT_V = \text{Max. } (|Y_{BU} - Y_{AU}| / Y_{AU} \times 100\%, |Y_{BD} - Y_{AD}| / Y_{AD} \times 100\%);$$

b. Y_{AU} , Y_{AD} , Y_{AL} , Y_{AR} = Luminance of measured location without Black pattern

Y_{BU} , Y_{BD} , Y_{BL} , Y_{BR} = Luminance of measured location with Black pattern

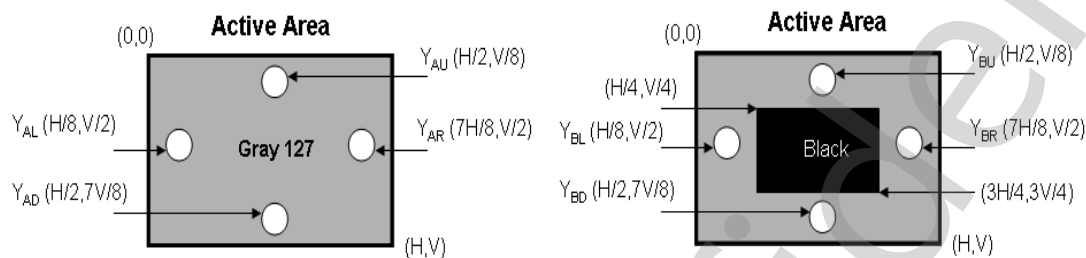**Note 2-8: Flicker measurement**

a. Test pattern: It is listed as following.

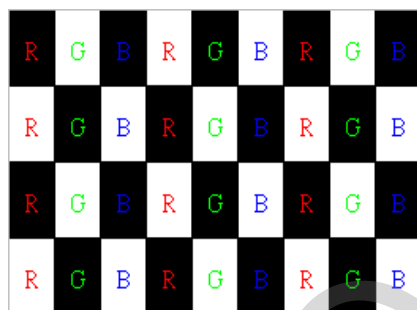

R: Red, G: Green, B: Blue



Gray level = L0



Gray level = L127

b. Measured position: Center of screen (P5) & perpendicular to the screen ($\theta = \Phi = 0^\circ$)



Product Specification


M190PW01 V80E/80F

AU OPTRONICS CORPORATION

3 TFT-LCD Module

3.1 Block Diagram

The following shows the block diagram of the 19 inch Color TFT-LCD Module.

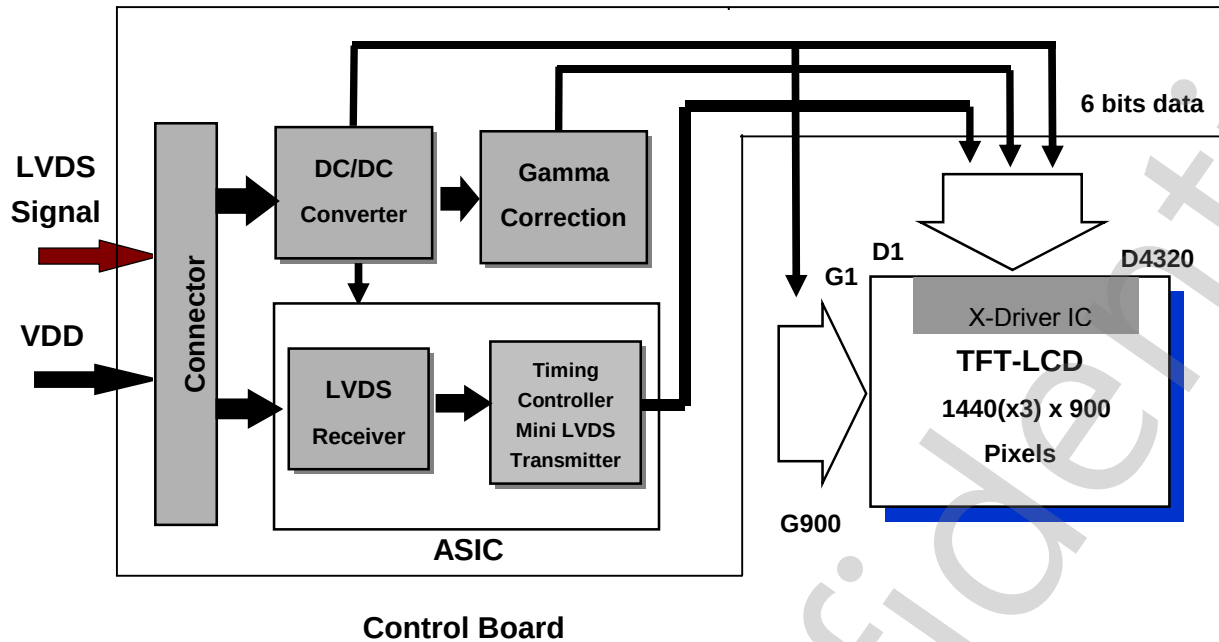



Product Specification

M190PW01 V80E/80F

AU OPTRONICS CORPORATION

3.2 Interface Connection

3.2.1 Connector Type

TFT-LCD Connector	Manufacturer	STM	CHIEF
	Part Number	MSCKT2407P30HB	093G30-02001A-M4
Mating Connector	Manufacturer	JAE	
	Part Number	FI-X30HL (Locked Type)	

3.2.2 Connector Pin Assignment

PIN #	Symbol	Description	Remark
1	RxO0-	Negative LVDS differential data input (Odd data)	
2	RxO0+	Positive LVDS differential data input (Odd data)	
3	RxO1-	Negative LVDS differential data input (Odd data)	
4	RxO1+	Positive LVDS differential data input (Odd data)	
5	RxO2-	Negative LVDS differential data input (Odd data)	
6	RxO2+	Positive LVDS differential data input (Odd data)	
7	GND	Ground	
8	RxOCLK-	Negative LVDS differential clock input (Odd clock)	
9	RxOCLK+	Positive LVDS differential clock input (Odd clock)	
10	RxO3-	Negative LVDS differential data input (Odd data)	
11	RxO3+	Positive LVDS differential data input (Odd data)	
12	RxE0-	Negative LVDS differential data input (Even data)	
13	RxE0+	Positive LVDS differential data input (Even data)	
14	GND	Ground	
15	RxE1-	Negative LVDS differential data input (Even data)	
16	RxE1+	Positive LVDS differential data input (Even data)	
17	GND	Ground	
18	RxE2-	Negative LVDS differential data input (Even data)	
19	RxE2+	Positive LVDS differential data input (Even data)	
20	RxECLK-	Negative LVDS differential clock input (Even clock)	
21	RxECLK+	Positive LVDS differential clock input (Even clock)	
22	RxE3-	Negative LVDS differential data input (Even data)	
23	RxE3+	Positive LVDS differential data input (Even data)	
24	GND	Ground	
25	NC	No connection (for AUO test only. Do not connect)	
26	NC	No connection (for AUO test only. Do not connect)	




Product Specification

M190PW01 V80E/80F

AU OPTRONICS CORPORATION

27	NC	No connection (for AUO test only. Do not connect)	
28	VDD	Power Supply Input Voltage	
29	VDD	Power Supply Input Voltage	
30	VDD	Power Supply Input Voltage	

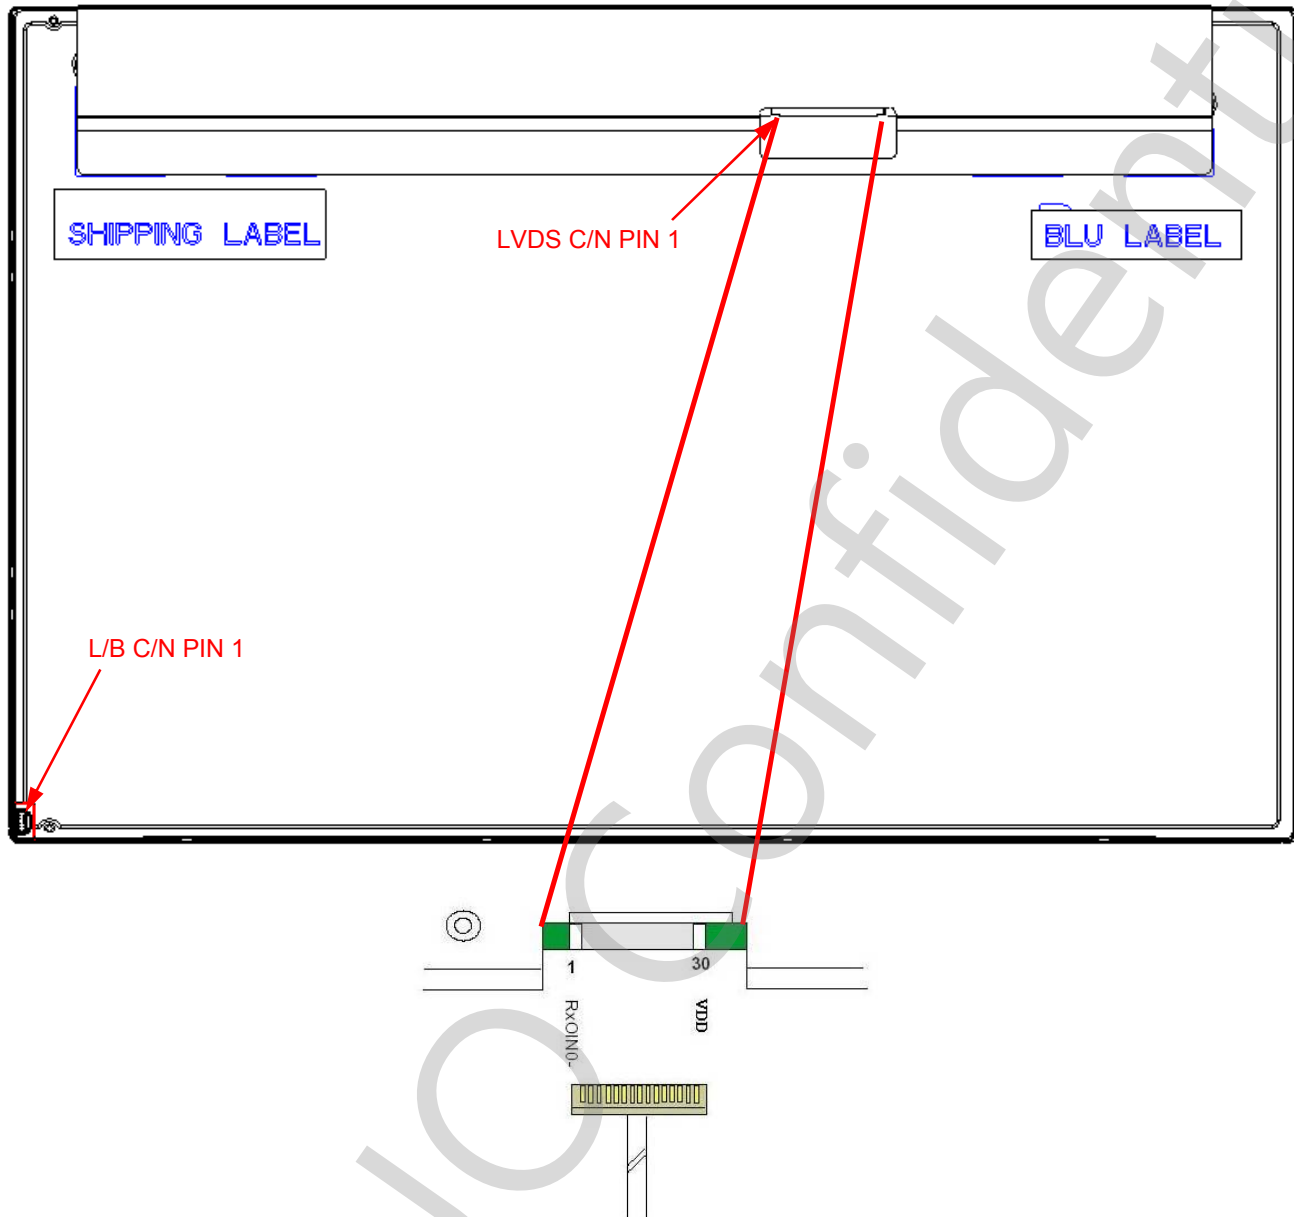



Product Specification

M190PW01 V80E/80F

AU OPTRONICS CORPORATION

3.3 Electrical Characteristics

3.3.1 Absolute Maximum Rating

Permanent damage may occur if exceeding the following maximum rating.


Symbol	Description	Min	Max	Unit	Remark
VDD	Power Supply Input Voltage	GND-0.3	6.0	[Volt]	Ta=25°C

3.3.2 Recommended Operating Condition

Symbol	Description	Min	Typ	Max	Unit	Remark
VDD	Power supply Input voltage	4.5	5.0	5.5	[Volt]	
IDD	Power supply Input Current (RMS)	-	0.4	0.5	[A]	VDD= 5.0V, Black Pattern, Fv=60Hz
			0.5	0.6	[A]	VDD= 5.0V, Black Pattern, Fv=75Hz
PDD	VDD Power Consumption	-	2.0	2.5	[Watt]	VDD= 5.0V, Black Pattern, Fv=60Hz
			2.5	3.0	[Watt]	VDD= 5.0V, Black Pattern, Fv=75Hz
IRush	Inrush Current	-	-	3.0	[A]	Note 3-1
VDDrp	Allowable VDD Ripple Voltage	-		500	[mV]	VDD= 5.0V, Black Pattern, Fv=75Hz

Note 3-1: Inrush Current measurement:

Test circuit:

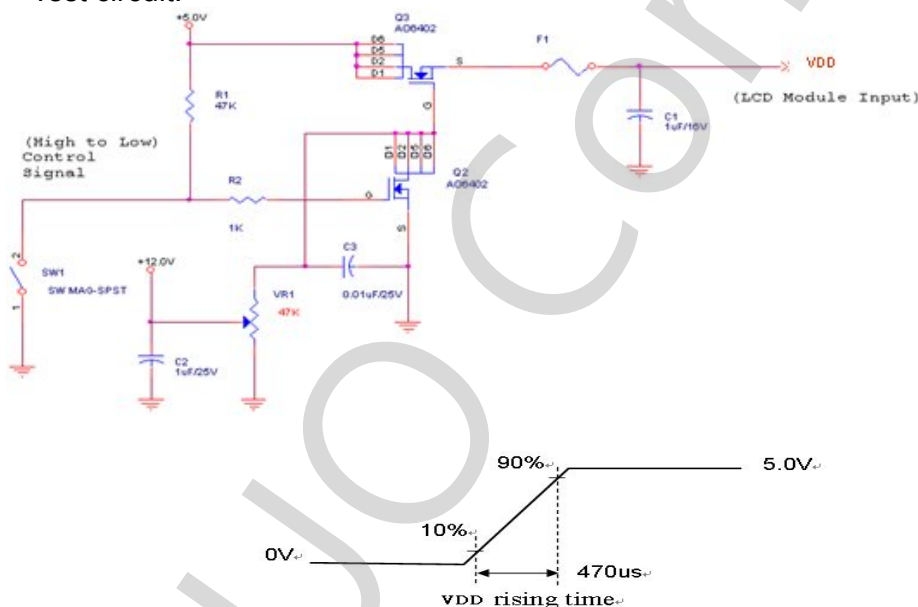



Product Specification


M190PW01 V80E/80F

AU OPTRONICS CORPORATION


The duration of VDD rising time: 470us.

3.4 Signal Characteristics

3.4.1 LCD Pixel Format

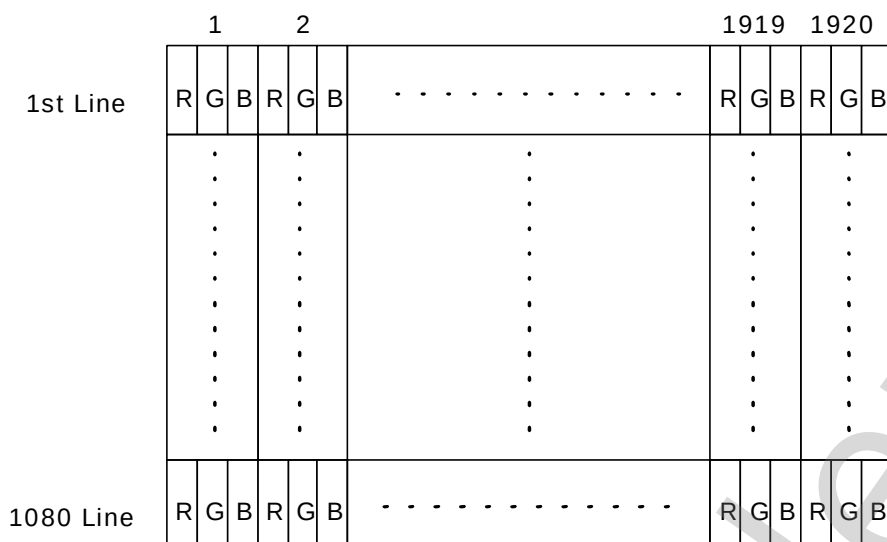

3.4.2 LVDS Data Format

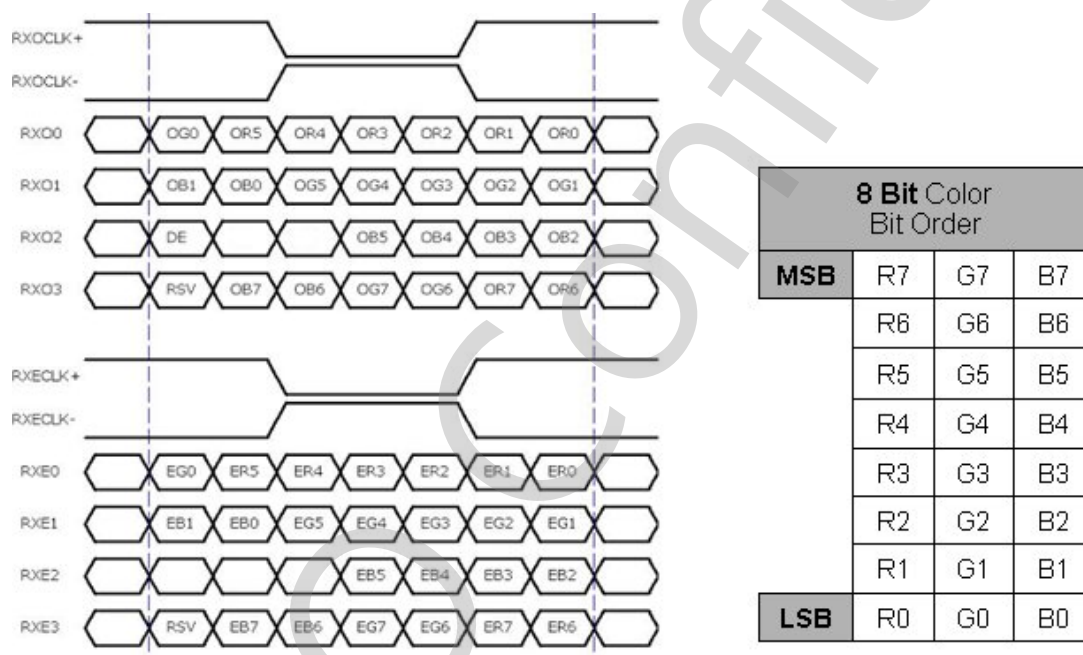

Note 3-2:

- O = "Odd Pixel Data" E = "Even Pixel Data"
- Refer to 3.4.1 LCD pixel format, the 1st data is 1 (Odd Pixel Data), the 2nd data is 2 (Even Pixel Data) and the last data is 1440 (Even Pixel Data).



Product Specification

M190PW01 V80E/80F

AU OPTRONICS CORPORATION

3.4.3 Color versus Input Data

The following table is for color versus input data (8bit). The higher the gray level, the brighter the color.

Color	Gray Level	Color Input Data																								Remark
		RED data (MSB :R7, LSB :R0)								GREEN data (MSB :G7, LSB :G0)								BLUE data (MSB :B7, LSB :B0)								
		R7	R6	R5	R4	R3	R2	R1	R0	G7	G6	G5	G4	G3	G2	G1	G0	B7	B6	B5	B4	B3	B2	B1	B0	
Black	-	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
White	-	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	
Gray 127	-	0	1	1	1	1	1	1	1	0	1	1	1	1	1	1	1	0	1	1	1	1	1	1	1	
Red	L0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	Black
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	
	L255	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
Green	L0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	Black
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	
	L255	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	
Blue	L0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	Black
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	
	L255	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	



Product Specification

M190PW01 V80E/80F

AU OPTRONICS CORPORATION


3.4.4 LVDS Specification

a. DC Characteristics:

Symbol	Description	Min	Typ	Max	Units	Condition
V_{TH}	LVDS Differential Input High Threshold	-	-	+100	[mV]	$V_{CM} = 1.2V$
V_{TL}	LVDS Differential Input Low Threshold	-100	-	-	[mV]	$V_{CM} = 1.2V$
$ V_{ID} $	LVDS Differential Input Voltage	100	-	600	[mV]	
V_{CM}	LVDS Common Mode Voltage	+1.0	+1.2	+1.5	[V]	$V_{TH}-V_{TL} = 200mV$

LVDS Signal Waveform:

Use RxOCLK- & RxOCLK+ as example.

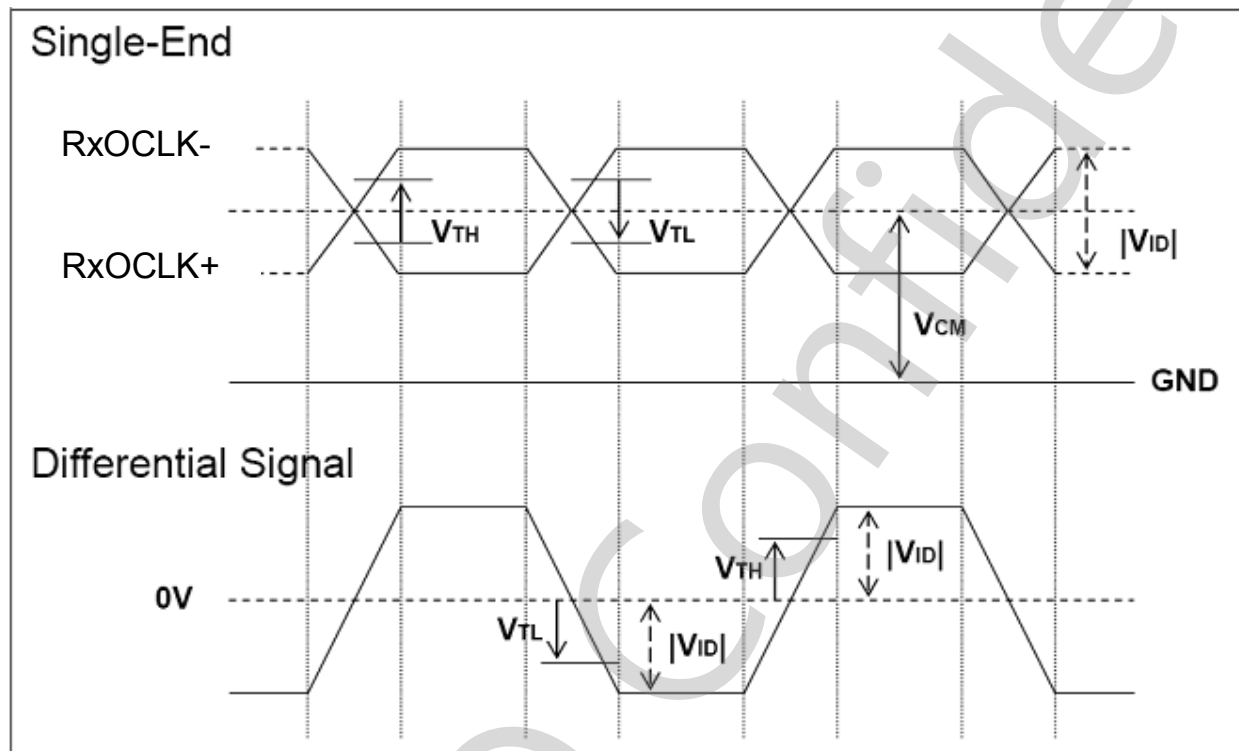




Product Specification

M190PW01 V80E/80F

AU OPTRONICS CORPORATION

b. AC Characteristics:

Symbol	Description	Min	Max	Unit	Remark
F_{DEV}	Maximum deviation of input clock frequency during Spread Spectrum	-	± 3	%	
F_{MOD}	Maximum modulation frequency of input clock during Spread Spectrum	-	200	KHz	

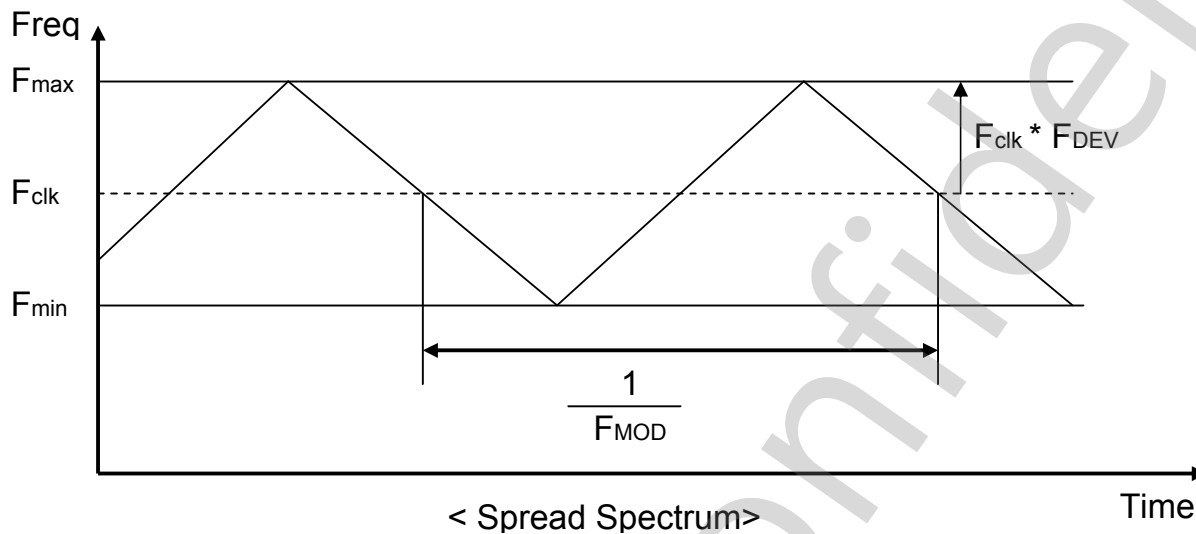

F_{clk} : LVDS Clock Frequency



Product Specification

M190PW01 V80E/80F

AU OPTRONICS CORPORATION

3.4.5 Input Timing Specification

It only support DE mode, and the input timing are shown as the following table.

Symbol	Description		Min.	Typ.	Max.	Unit	Remark
Tv	Vertical Section	Period	914	916	1801	Th	
Tdisp (v)		Active	900	900	900	Th	
Tblk (v)		Blanking	14	16	901	Th	
Fv		Frequency	49	60	76	Hz	
Th	Horizontal Section	Period	760	964	1498	Tclk	
Tdisp (h)		Active	720	720	720	Tclk	
Tblk (h)		Blanking	40	244	778	Tclk	
Fh		Frequency	44.9	55.0	88.2	KHz	Note 3-3
Tclk	LVDS Clock	Period	15.0	18.9	29.3	ns	1/Fclk
Fclk		Frequency	34.1	53.0	67.1	MHz	Note 3-4

Note 3-3: The equation is listed as following. Please don't exceed the above recommended value.

$$Fh (\text{Min.}) = Fclk (\text{Min.}) / Th (\text{Min.});$$

$$Fh (\text{Typ.}) = Fclk (\text{Typ.}) / Th (\text{Typ.});$$

$$Fh (\text{Max.}) = Fclk (\text{Max.}) / Th (\text{Min.});$$

Note 3-4: The equation is listed as following. Please don't exceed the above recommended value.

$$Fclk (\text{Min.}) = Fv (\text{Min.}) \times Th (\text{Min.}) \times Tv (\text{Min.});$$

$$Fclk (\text{Typ.}) = Fv (\text{Typ.}) \times Th (\text{Typ.}) \times Tv (\text{Typ.});$$

$$Fclk (\text{Max.}) = Fv (\text{Max.}) \times Th (\text{Typ.}) \times Tv (\text{Typ.});$$




Product Specification

M190PW01 V80E/80F

AU OPTRONICS CORPORATION

3.4.6 Input Timing Diagram

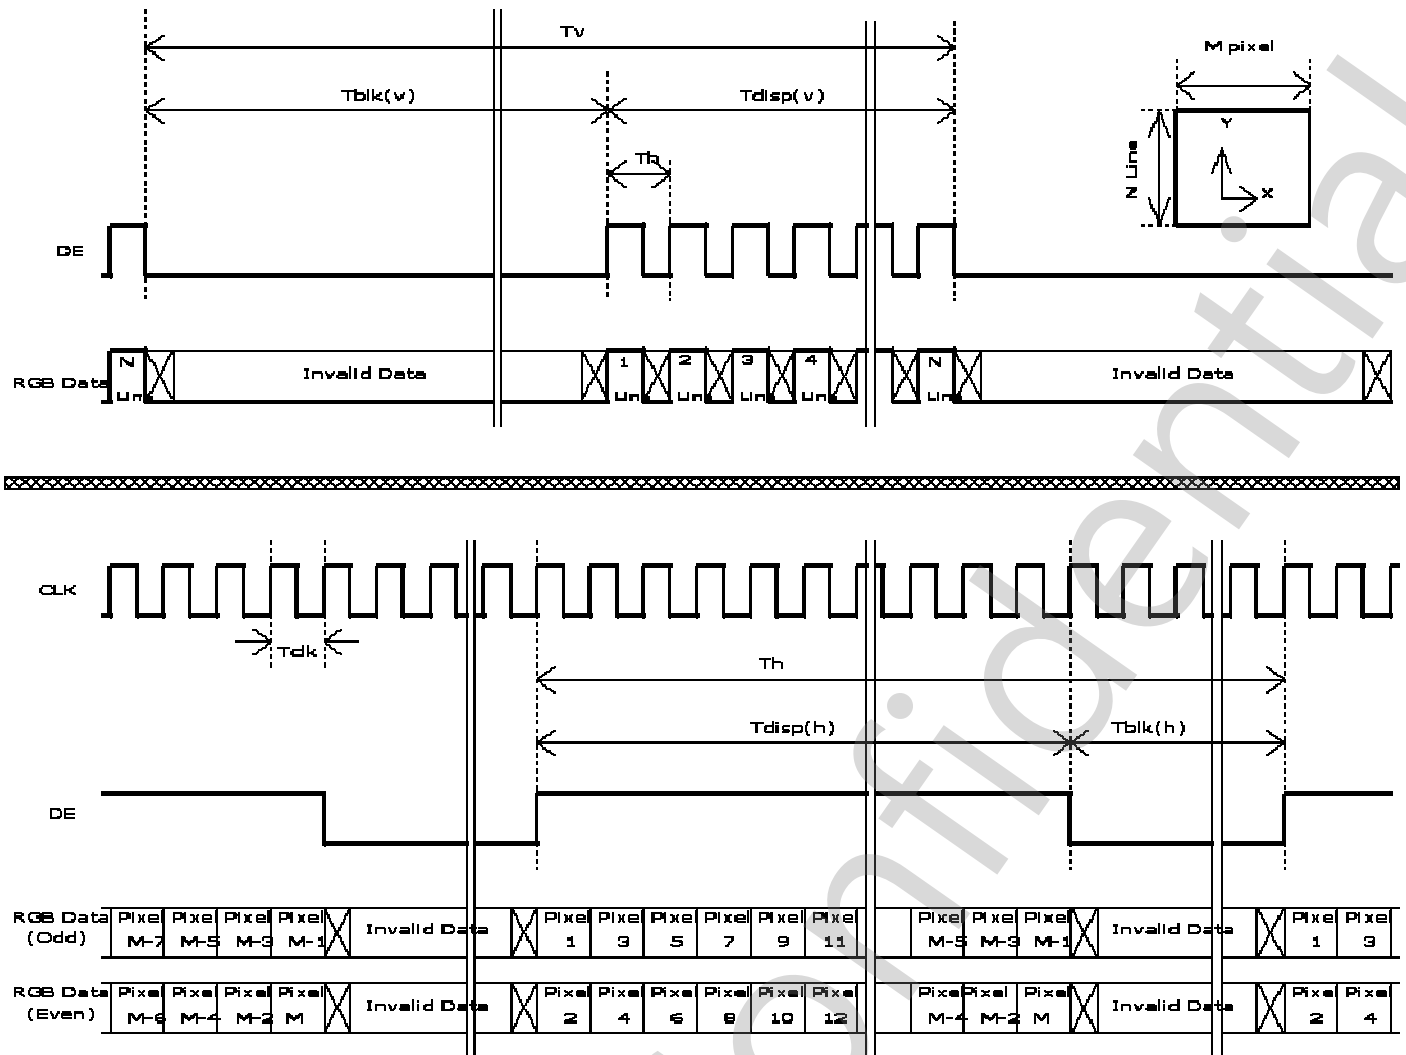




Product Specification

M190PW01 V80E/80F

AU OPTRONICS CORPORATION

3.5 Power ON/OFF Sequence

VDD power, LVDS signal and backlight on/off sequence are as following. LVDS signals from any system shall be Hi-Z state when VDD is off.

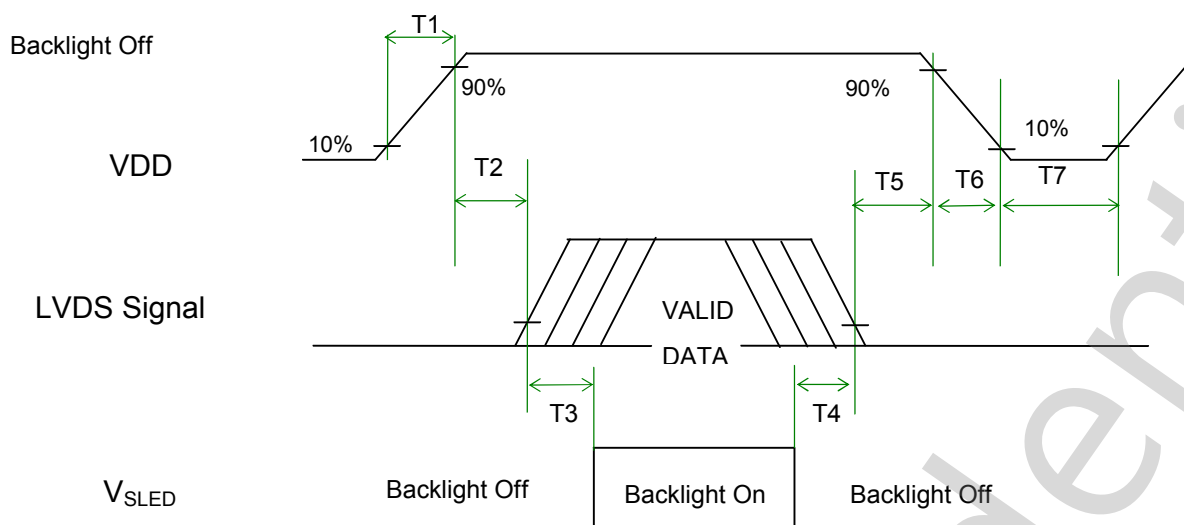

Power Sequence Timing

Symbol	Value			Unit	Remark
	Min.	Typ.	Max.		
T1	0.5	-	10	[ms]	
T2	0	-	50	[ms]	
T3	500	-	-	[ms]	
T4	100	-	-	[ms]	
T5	0	-	50	[ms]	Note 3-5 Note 3-6
T6	0	-	150	[ms]	Note 3-6
T7	1000	-	-	[ms]	

Note 3-5 : Recommend setting T5 = 0ms to avoid electronic noise when VDD is off.

Note 3-6 : During T5 and T6 period , please keep the level of input LVDS signals with Hi-Z state.



Product Specification


M190PW01 V80E/80F

AU OPTRONICS CORPORATION

4 Backlight Unit

4.1 Block Diagram

The following shows the block diagram of the 19 inch Backlight Unit. And it includes 44 pcs LED in the LED light bar. (4 strings and 11 pcs LED of one string).

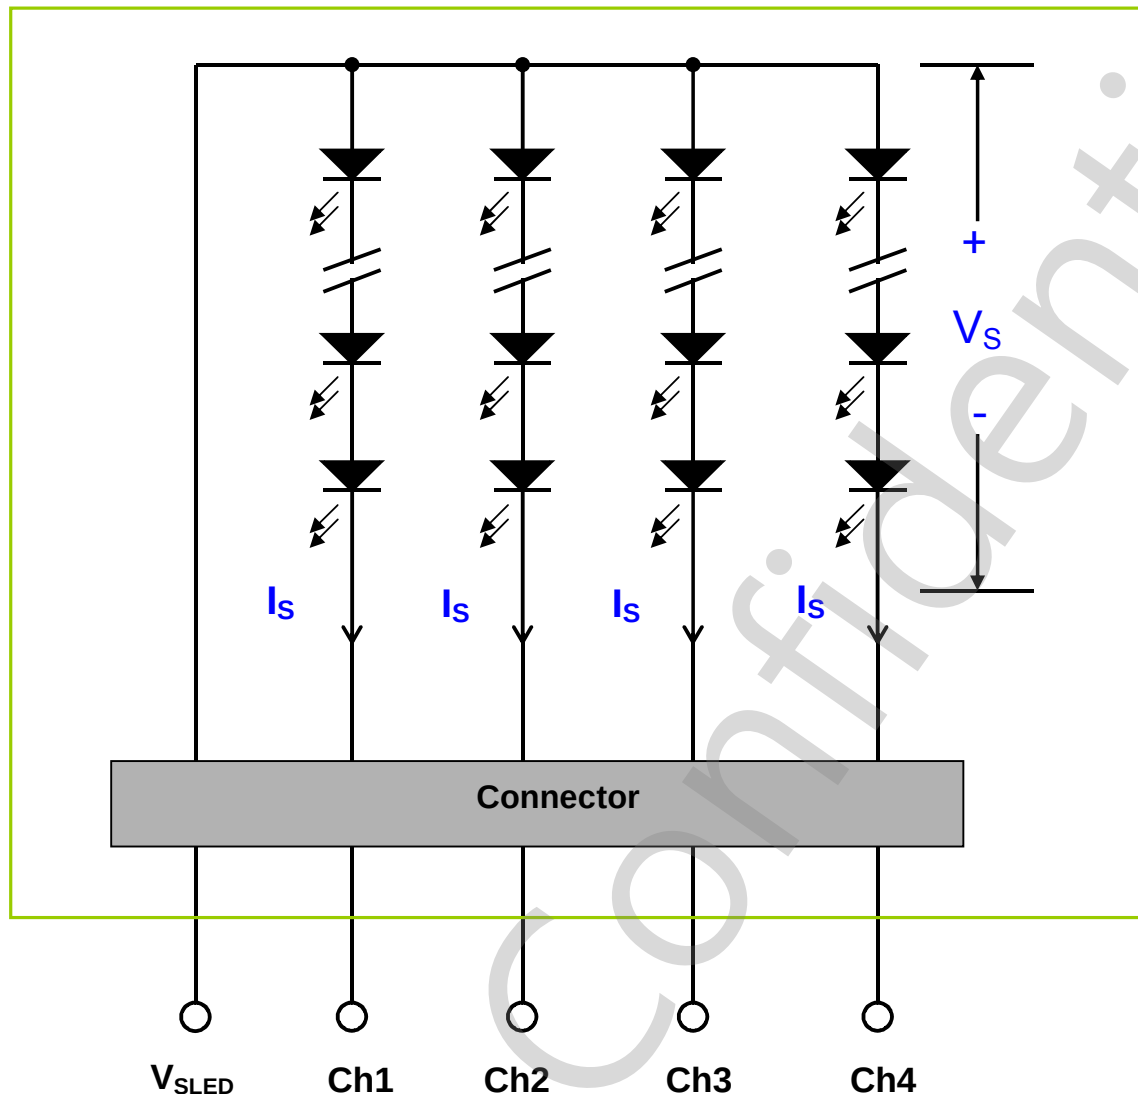



Product Specification

M190PW01 V80E/80F

AU OPTRONICS CORPORATION



4.2 Interface Connection

4.2.1 Connector Type

Backlight Connector	Manufacturer	ENTERY
	Part Number	3707K-S06N-21R
Mating Connector	Manufacturer	ENTERY
	Part Number	H112K-P06N-13B (Locking type)

Backlight Connector dimension:

$H \times V \times D = 7.9 \times 3.05 \times 4.25$, Pitch = 1.0(unit = mm)

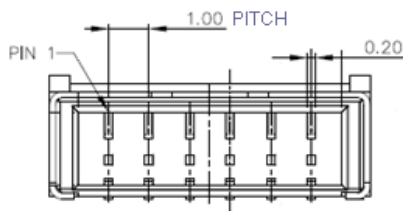





Product Specification

M190PW01 V80E/80F

AU OPTRONICS CORPORATION

Mating Connector dimension:

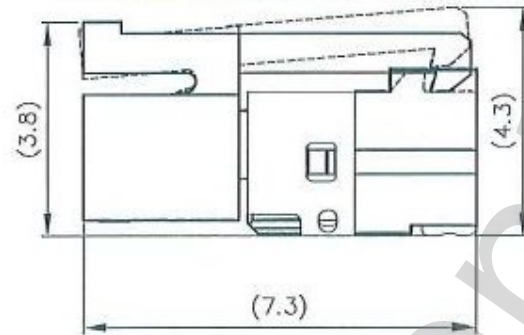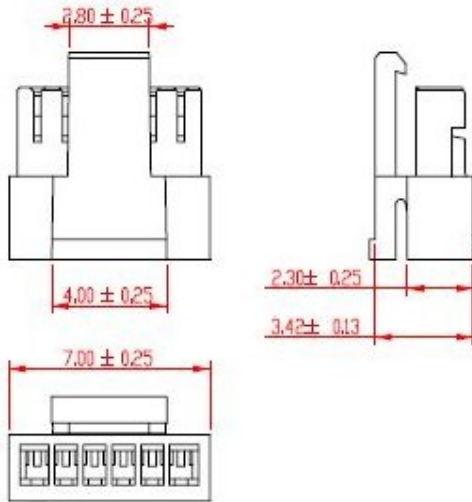




Product Specification

M190PW01 V80E/80F

AU OPTRONICS CORPORATION

4.2.2 Connector Pin Assignment

Pin#	Symbol	Description	Remark
1	Ch1	LED Current Feedback Terminal (Channel 1)	
2	Ch2	LED Current Feedback Terminal (Channel 2)	
3	V _{SLED}	LED Power Supply Voltage Input Terminal	
4	V _{SLED}	LED Power Supply Voltage Input Terminal	
5	Ch3	LED Current Feedback Terminal (Channel 3)	
6	Ch4	LED Current Feedback Terminal (Channel 4)	

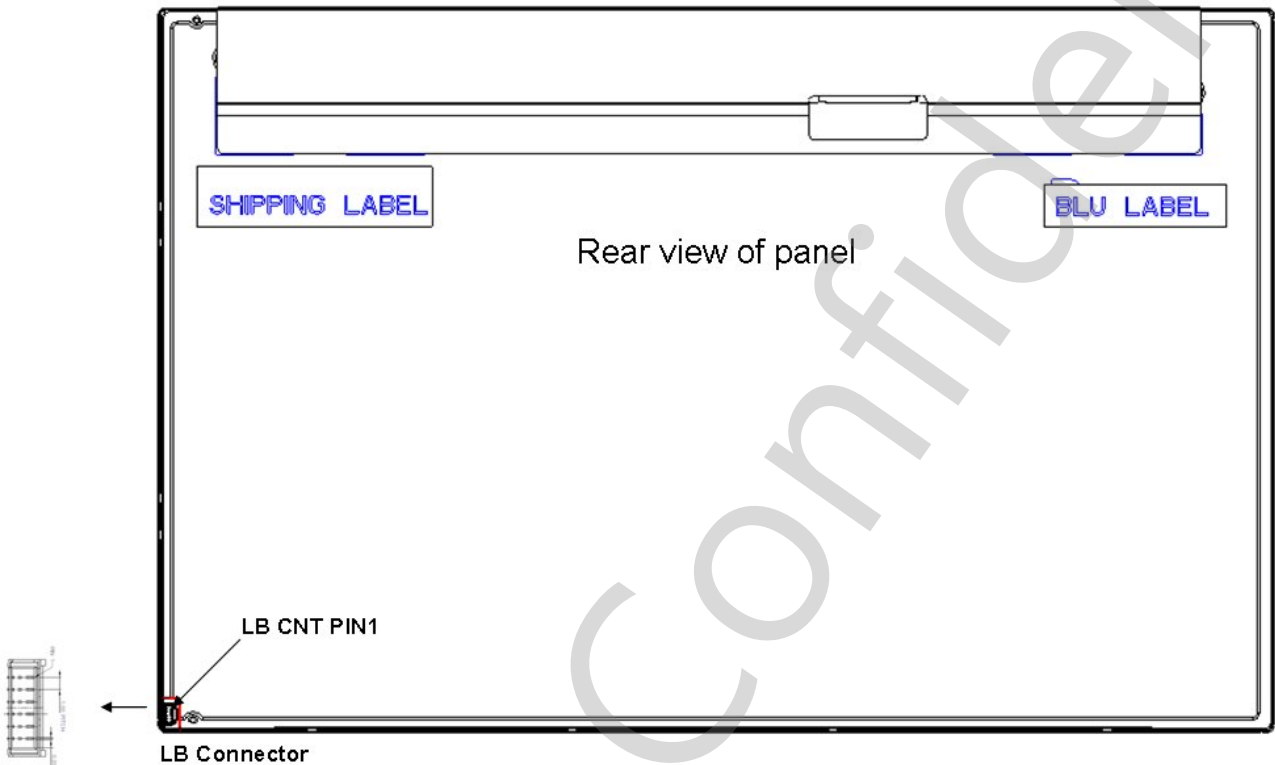



Product Specification

M190PW01 V80E/80F

AU OPTRONICS CORPORATION


4.3 Electrical Characteristics

4.3.1 Absolute Maximum Rating

Permanent damage may occur if exceeding the following maximum rating.

(Ta=25°C)

Symbol	Description	Min	Max	Unit	Remark
Is	LED String Current	0	90	[mA]	100% duty ratio
			150	[mA]	Duty ratio $\leq 10\%$ Pulse time=10 ms



Duty ratio= (A / B) X 100% ; (A: Pulse time, B: Period)

4.3.2 Recommended Operating Condition

(Ta=25°C)

Symbol	Description	Min.	Typ.	Max.	Unit	Remark
Is	LED String Current	-	60	66	[mA]	100% duty ratio of LED chip
Vs	LED String Voltage	30.8	35.2	39.6	[Volt]	Is=60mA @ 100% duty ratio; Note 4-1, Note 4-5
ΔVs	Maximum Vs Voltage Deviation of light bar	-	-	2.2	[Volt]	Is=60mA @ 100% duty ratio; Note 4-2
P _{BLU}	LED Light Bar Power Consumption	-	8.4	9.5	[Watt]	Note 4-3
LT _{LED}	LED Life Time	30,000	-	-	[Hour]	Note 4-4
OVP	Over Voltage Protection in system board	110% Vsmax	-	-	[Volt]	Note 4-5



Product Specification


M190PW01 V80E/80F

AU OPTRONICS CORPORATION

Note 4-1: $V_s (\text{Typ.}) = V_F (\text{Typ.}) \times \text{LED No. (one string)}$;

a. V_F : LED chip forward voltage, $V_F (\text{Min.})=2.8\text{V}$, $V_F (\text{Typ.})=3.2\text{V}$, $V_F (\text{Max.})=3.6\text{V}$

b. The same equation to calculate $V_s (\text{Min.})$ & $V_s (\text{Max.})$ for respective $V_F (\text{Min.})$ & $V_F (\text{Max.})$;



Note 4-2: $\Delta V_s (\text{Max.}) = \Delta V_F \times \text{LED No. (one string)}$;

a. ΔV_F : LED chip forward voltage deviation; (0.2 V , each Bin of LED V_F)

Note 4-3: $P_{\text{BLU}} (\text{Typ.}) = V_s (\text{Typ.}) \times I_s (\text{Typ.}) \times 4$; (4 is total String No. of LED Light bar)

$P_{\text{BLU}} (\text{Max.}) = V_s (\text{Max.}) \times I_s (\text{Typ.}) \times 4$;

Note 4-4: Definition of life time:

a. Brightness of LED becomes to 50% of its original value

b. Test condition: $I_s = 60\text{mA}$ and 25°C (Room Temperature)

Note 4-5: Recommendation for LED driver power design:

Due to there are electrical property deviation in LED & monitor set system component after long time operation. AUO strongly recommend the design value of LED driver board OVP (over voltage protection) should be 10% higher than max. value of LED string voltage (V_s) at least.

Note 4-6: AUO strongly recommend “ Analog Dimming ” method for backlight brightness control for Wavy Noise Free. Otherwise, recommend that Dimming Control Signal (PWM Signal) should be synchronized with Frame Frequency.



Product Specification

M190PW01 V80E/80F

AU OPTRONICS CORPORATION

5 Reliability Test

AUO reliability test items are listed as following table. (*Bare Panel only*)

Items	Condition	Remark
Temperature Humidity Bias (THB)	Ta= 50°C, 80%RH, 300hours	
High Temperature Operation (HTO)	Ta= 50°C, 50%RH, 300hours	
Low Temperature Operation (LTO)	Ta= 0°C, 300hours	
High Temperature Storage (HTS)	Ta= 60°C, 300hours	
Low Temperature Storage (LTS)	Ta= -20°C, 300hours	
Vibration Test (Non-operation)	Acceleration: 1.5 Grms Wave: Random Frequency: 10 - 200 Hz Sweep: 30 Minutes each Axis (X, Y, Z)	
Shock Test (Non-operation)	Acceleration: 50 G Wave: Half-sine Active Time: 20 ms Direction: $\pm X$, $\pm Y$, $\pm Z$ (one time for each Axis)	
Thermal Shock Test (TST)	-20°C/30min, 60°C/30min, 100 cycles	Note 5-1
On/Off Test	On/10sec, Off/10sec, 30,000 cycles	
ESD (Electro Static Discharge)	Contact Discharge: $\pm 15KV$, 150pF(330 Ω) 1sec, 8 points, 25 times/ point.	Note 5-2
	Air Discharge: $\pm 15KV$, 150pF(330 Ω) 1sec 8 points, 25 times/ point.	
Altitude Test	Operation:18,000 ft Non-Operation:40,000 ft	

Note 5-1: a. A cycle of rapid temperature change consists of varying the temperature from -20°C to 60°C, and back again. Power is not applied during the test.
b. After finish temperature cycling, the unit is placed in normal room ambient for at least 4 hours before power on.

Note 5-2: EN61000-4-2, ESD class B: Certain performance degradation allowed
No data lost
Self-recoverable
No hardware failures.




Product Specification

M190PW01 V80E/80F

AU OPTRONICS CORPORATION

6 Shipping Label

The label is on the panel as shown below:

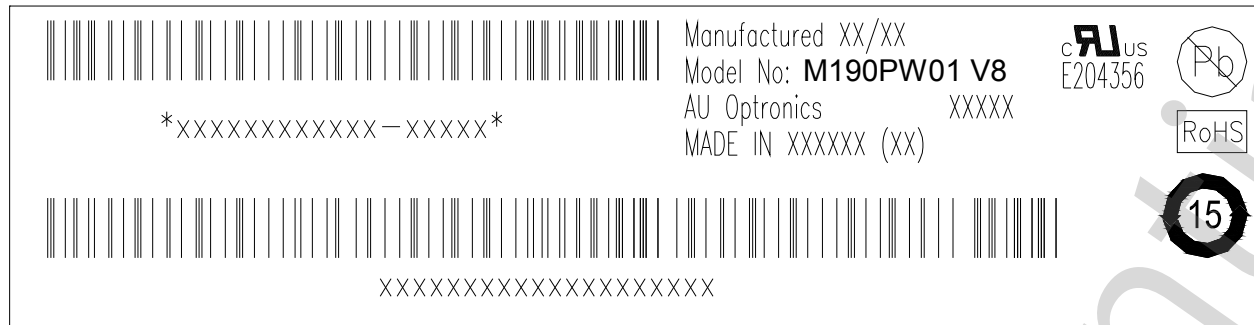

Note 6-1: For Pb Free products, AUO will add  for identification.

Note 6-2: For RoHS compatible products, AUO will add  for identification.


Note 6-3: For China RoHS compatible products, AUO will add  for identification.

Note 6-4: The Green Mark will be presented only when the green documents have been ready by AUO Internal Green Team.

7 Mechanical Characteristics

NOTES:



1. THE DIMENSION EXCLUDES DEFORMATION.
2. TOLERANCE WITHOUT NOTICED TO BE $\pm 0.5\text{MM}$.
3. SUGGEST FOR CUSTOMER SCREW SELECTION:
CUSTOMER ASSEMBLY TOLERANCE + CUSTOMER CHASSIS THICKNESS
4. LB CONNECTOR TO BE 3707K-S06N-21.
5. TORQUE OF M3 USER HOLE SHOULD BE WITHIN 4 KGF-CM
AND RE-SCREW 10 TIMES.

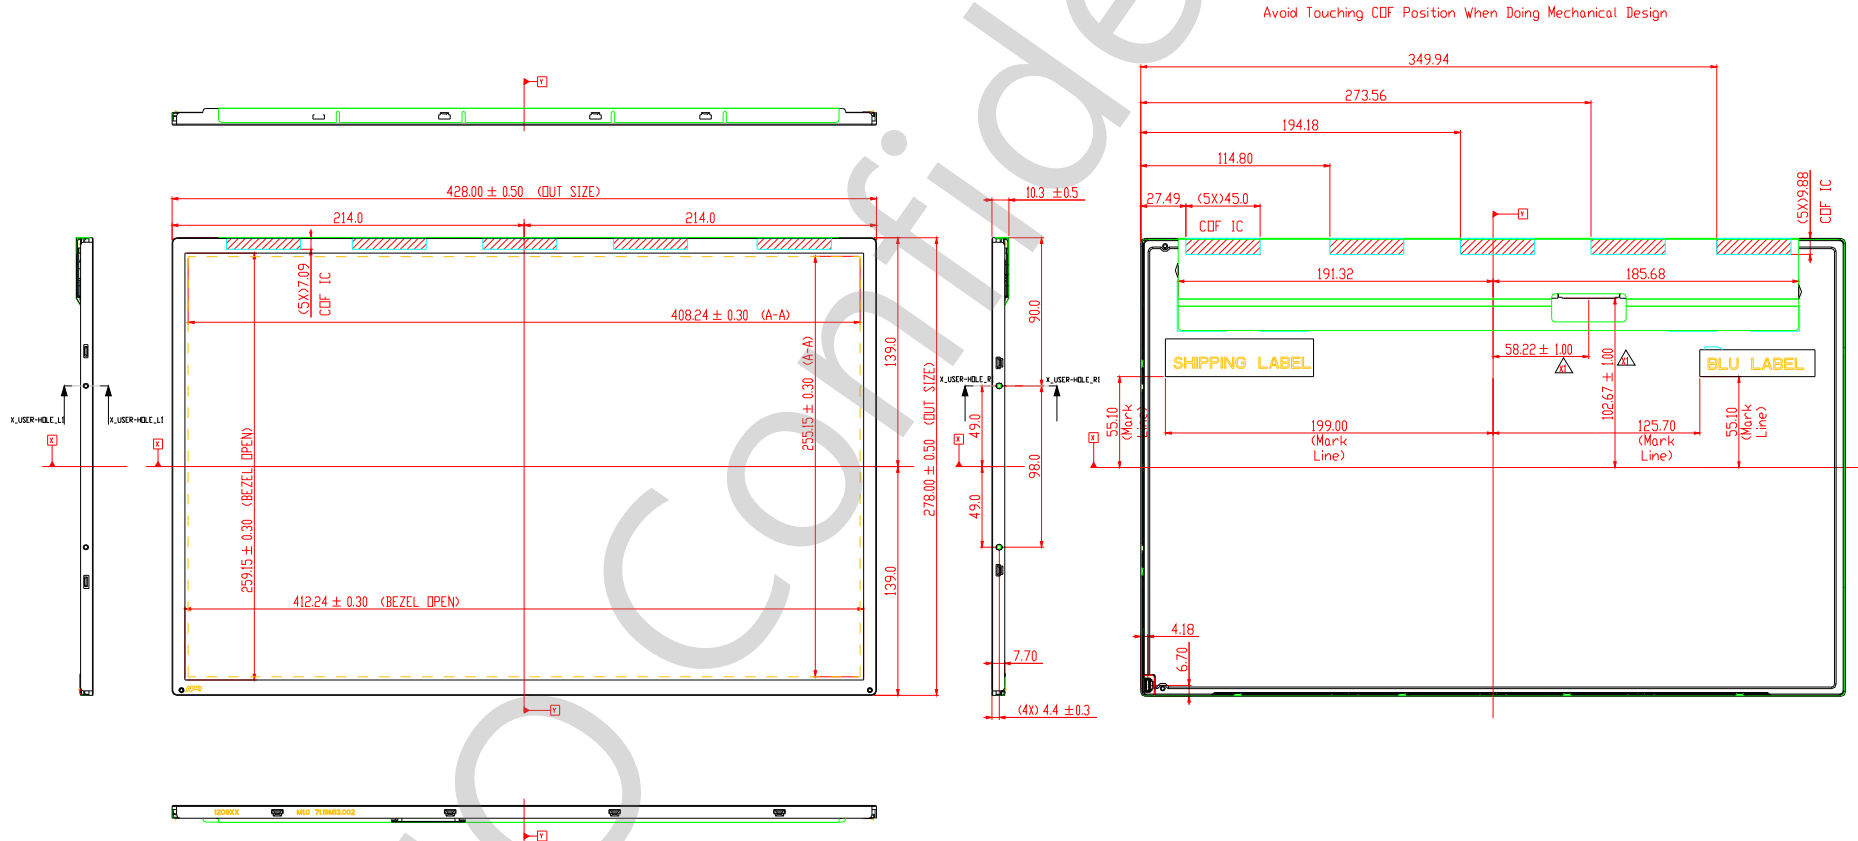

Avoid touching COF position when doing mechanical design

8 Packing Specification

8.1 Packing Flow

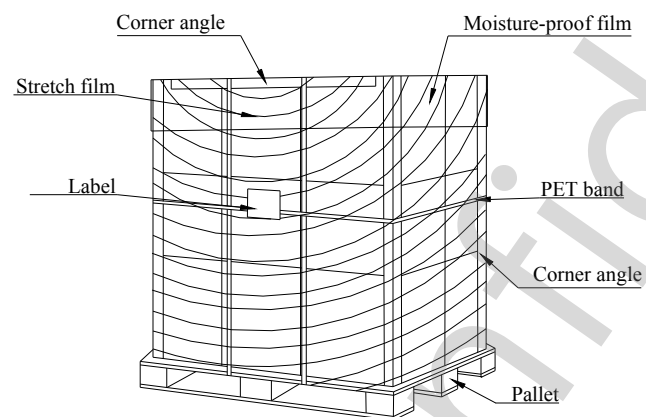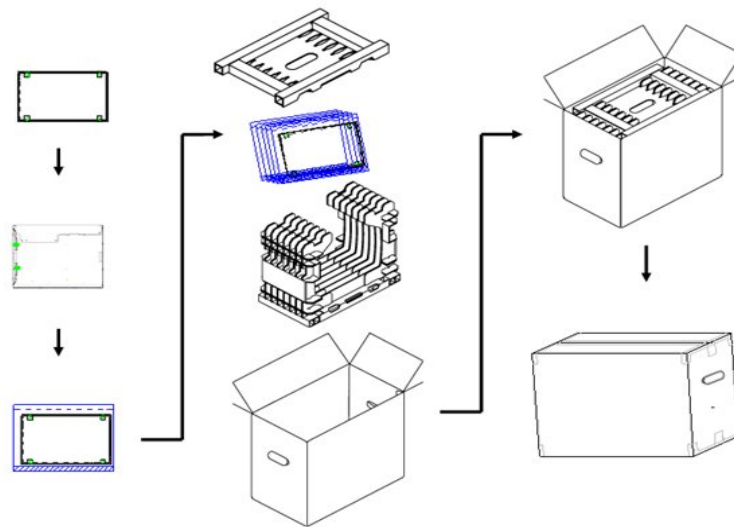

8.2 Pallet and shipment information

Item	Specification			Remark
	Q'ty	Dimension	Weight(kg)	
Panel	1	428(H)mm × 278(V)mm × 11(D)mm	1.520	
Cushion	1	-	1.88	
Box	1	524(L)mm x 282(W)mm x 356(H)mm	1.10	without Panel & cushion
Packing Box	10 pcs/Box	524(L)mm x 282(W)mm x 356(H)mm	18.18	with panel & cushion
Pallet	1	1150(L)mm x 1070(W)mm x 132(H)mm	15.0	
Pallet after Packing	18 boxes/pallet	1150(L)mm x 1070(W)mm x 1208(H)mm	448.3	