


eBOX671-885-FL

Fanless Embedded System with LGA1150 Socket 4th Gen Intel® Core™ i7/i5/i3 & Celeron® Processor, Intel® Q87, 4 PoE, 6 USB 3.0, HDMI/DVI/DisplayPort and 2 PCIe Mini Cards


Features

- LGA1150 4th gen Intel® Core™ i7/i5/i3 & Celeron® processors (Haswell and Haswell Refresh)
- Intel® Q87 chipset
- Fanless operation design with full feature I/O
- 4-CH GbE PoE
- 2.5" 12 mm SATA HDD drive bay, mSATA and CFast™ slot
- 2 internal PCI Express Mini Card slots, 1 SIM card slot
- DisplayPort, HDMI and DVI-I with triple-view supported
- Supports RAID 0/1, Jumbo Frame (9.5K), WoL, PXE and Teaming
- Supports Intel® AMT, Intel® VT-d, Intel® vPro™ and Intel® RST

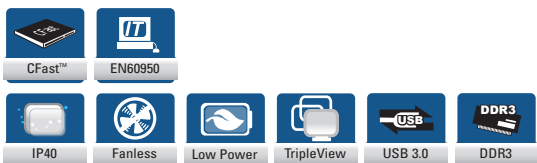

Specifications

Standard Color	Silver-Black
Construction	Aluminum extrusion and heavy-duty steel, IP40
CPU	4th generation Intel® Core™ i7/i5/i3 & Celeron® processor with TDP max. up to 45 W
System Memory	2 x 204-pin DDR3 1333/1600 SO-DIMM, up to 16GB
Chipset	Intel® Q87
BIOS	AMI
System I/O Outlet	2 x 10/100/1000 Mbps Ethernet (Intel® i211) 4 x 10/100/1000 Mbps Power over Ethernet (PoE) - 4 port full-load, IEEE802.3af Class 2 (7 Watt) - 2 port full-load, IEEE802.3af Class 3 (15.4 Watt) - 1 port full-load, IEEE802.3at Class 4 (30 Watt) 2 x RS-232/422/485 2 x RS-232 8-CH Programmable/Isolated DI/DO 6 x USB 3.0 2 x USB 2.0 1 x audio (MIC-in/Line-out) 1 x DVI-I 1 x HDMI 1 x DisplayPort 1 x 24 VDC power input connector 1 x Power switch 1 x Reset switch 1 x Remote power switch 3 x Antenna opening
Watchdog Timer	255 levels, 1 ~ 255 sec.
Storage	2 x 2.5" 12 mm SATA HDD drive bay (RAID 0/1 supported) 1 x CFast™ (front access) 2 x mSATA
Expansion Interface	2 x full-size PCI Express Mini Card slot (USB+PCIe signal) 1 x SIM Card slot
TPM	N/A
System Indicator	1 x blue LED for system power 1 x orange LED for HDD active
Power Supply	24 VDC input
Operating Temperature	-20°C ~ +50°C (-4°F ~ +122°F) (with W.T. SSD or CFast™, CPU TDP 45W)
Humidity	10% ~ 90%, non-condensing
Dimensions	280 mm (11.02") (W) x 210 mm (8.27") (D) x 76 mm (2.99") (H)
Weight (net/gross)	4.31 kg (9.5 lb) / 5.1 kg (11.24 lb)
Certificate	CE
EOS Support	WES7, WE8S, Linux

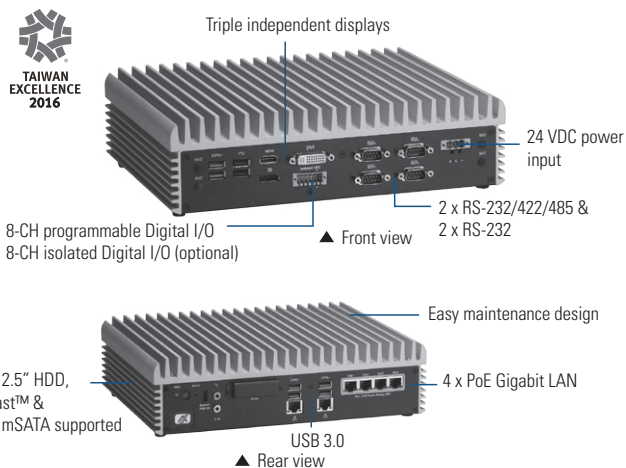

Power Protection

DC Version

- OVP (over voltage protection)
- UVP (under voltage protection)
- OCP (over current protection)
- SCP (short circuit protection)
- Reserve protection

Ordering Information

Standard

eBOX671-885-FL-DC	Fanless embedded system with Intel® Core™ i7/i5/i3 & Celeron® processor, Intel® Q87, DVI-I/HDMI/DisplayPort, dual HDD, 4 PoE, 2 GbE LANs, 8 USB, audio, 4 COM and 8-CH TTL digital I/O and 24 VDC
eBOX671-885-FL-DC-I	Fanless embedded system with Intel® Core™ i7/i5/i3 & Celeron® processor, Intel® Q87, DVI-I/HDMI/DisplayPort, dual HDD, 4 PoE, 2 GbE LANs, 8 USB, audio, 4 COM and 8-CH isolated digital I/O and 24 VDC

Optional

2.5" SATA HDD	80GB or above
2.5" SATA SSD	40GB or above
DDR3 SO-DIMM	1GB ~ 8GB
CFast™	512MB or above
Wall mount kit	8816K6713A0E
DIN-rail kit	8816K671030E
Wi-Fi module	
3G module	

Dimensions

