

tBOX810-838-FL

Fanless Embedded System with Intel® Atom® Processor E3845/E3827 for Vehicle, Railway and Marine PC

Features

- CE, FCC, EN 50155, EN 45545-2, E-Mark, DNV 2.4 and IEC 60945 certified
- Intel® Atom® processor E3845 or E3827
- Fanless and Wide operating temperatures from -40°C to +70°C
- DDR3L-1333 4GB memory onboard
- Compact size with multiple I/Os
- Intelligent solution of vehicle power management (ACC ignition)
- 2 PCI Express Mini Card slots and 1 SIM card slot



▲ Front view

Mic-in, Line-out, Line-in (optional)



M12/Phoenix DC power input

M12/RJ-45 GbE LAN

Antenna opening

▲ Rear view




Specifications

Standard Color	Silver black	
Construction	Aluminum extrusion and heavy-duty steel, IP40	
CPU	Intel® Atom® E3845 4C @1.91 GHz, TDP: 10W Intel® Atom® E3827 2C @1.75 GHz, TDP: 8W	
Chipset	SoC integrated	
System Memory	DDR3L-1333, 4GB memory onboard	
BIOS	AMI	
System I/O Outlet	Serial	2 x DB9 serial console or RS-232/422/485
	Display	1 x VGA (supports up to 1920 x 1080 @60Hz)
	Audio	1 x Mic-in, 1 x Line-out, 1 x Line-in (optional)
	Ethernet	Railway: 2 x M12 A-coded 10/100/1000 Mbps Ethernet (Intel® i210-IT) Marine/Vehicle: 2 x RJ-45 10/100/1000 Mbps Ethernet (Intel® i210-IT)
	USB	2 x USB 2.0
	DIO	1 x DB9 8-bit programmable DIO
	Others	1 x Reset button 1 x Remote switch 4 x Antenna opening
Expansion Interface	2 x Full-size Rev.1.2 PCI Express Mini Card slot: • 1 x USB/PCIe with SIM socket • 1 x mSATA/USB/PCIe	
Storage	SATA Drive	1 x Internal 2.5" SATA drive (9.5 mm height)
	mSATA	1 x mSATA (occupied 1 x PCI Express Mini Card slot)
Watchdog Timer	255 levels, 1 to 255 sec.	
Power	Power Supply	Railway: 1 x M12, 24 VDC Vehicle: 1 x terminal block, 12/24 VDC with ACC ignition Marine: 1 x terminal block, 24 VDC
	Power consumption	24V, 1A

System Indicator	1 x LED indicator for SATA drive activity	
	1 x LED indicator for power 2 x LED indicator for LAN activity 2 x Programmable	
Operating Temperature	-40°C to +70°C (-40°F to +158°F) with W.T. peripheral*	
Humidity	0% to 95%, non-condensing	
Dimensions	164.1 mm (6.46") (W) x 108 mm (4.25") (D) x 44 mm (1.73") (H) (without wall mount)	
Mounting	Wall mount, Din-rail	
Weight (net/gross)	0.77 kg (1.70 lb)/2 kg (4.41 lb)	
Certifications	CE (Class A), FCC (Class A), EN 50155, EN 45545-2, E-Mark, DNV 2.4 and IEC 60945 certified	
	EMC	CE/FCC EN 55022 (Class A), EN 55024, FCC part 15 B (Class A) compliant
	EN 50155	EN 50121-3-2, IEC 62236-3-2
	E-Mark	ECE-R10
Vibration Endurance	3 Grms w/ SSD, 1 Grms w/ HDD (5 to 500Hz, X/Y/Z direction; random) MIL-STD-810G, Method 514.6C-VL Category 4 compliant	
	EN 50155	EN (IEC) 61373 category 1 class B
Shock	EN 50155	EN (IEC) 61373 category 1 class B, half-sine pulse, 5g, 30ms (longitudinal direction), 3g, 30ms (vertical/transverse direction)
	DNV 2.4	IEC 60068-2-1, IEC 60068-2-2, IEC 60068-2-6, IEC 60068-2-30
EOS Support	Windows® 10 64-bit, Windows® 8, Windows® 7 64/32-bit, VxWorks7, Linux	
Software Support	AMS.AXView 2.0	

*Wide operating temperature peripheral

Ordering Information

System	
tBOX810-838-FL-E3827/E3845-MRDC (P/N: E26N810106*) for E3845 (P/N: E26N810107*) for E3827 (P/N: E26N810109) for E3845 & Audio	Fanless railway grade embedded system with Intel® Atom® processor E3827/E3845, 4GB DRAM, 2 M12 GbE LANs, M12 DC-in, 2 USB, VGA, 2 COM, DIO, audio mic-in/line-in/line-out, and 24 VDC
*without Audio & CAN connector	
tBOX810-838-FL-E3827/E3845-TVDC/MVDC (P/N: E26N810104*) for E3845 (P/N: E26N810105*) for E3827 (P/N: E26N810110) for E3845 & Audio (P/N: E26N810121) for E3845 & CAN (P/N: E26N810122) for E3827 & CAN (P/N: E26N810100*) for E3845 & M12 DC-in (P/N: E26N810102*) for E3827 & M12 DC-in	Fanless vehicle grade embedded system with Intel® Atom® processor E3827/E3845, 4GB DRAM, 2 RJ-45/M12 GbE LANs, terminal block/M12 DC-in, 2 USB, VGA, 2 COM, DIO, CAN, audio mic-in/line-in/line-out, with ACC ignition, and 12/24 VDC
*without Audio & CAN connector	
tBOX810-838-FL-E3827/E3845-TMDC (P/N: E26N810114*) for E3845 (P/N: E26N810115*) for E3827 (P/N: E26N810119) for E3827 & CAN (P/N: E26N810120) for E3845 & CAN	Fanless marine grade embedded system with Intel® Atom® processor E3827/E3845, 4GB DRAM, 2 RJ-45 GbE LANs, terminal block DC-in, 2 USB, VGA, 2 COM, DIO, CAN, and 24 VDC
*without Audio & CAN connector	

*MRDC: M12 DC-in connector, railway SKU, DC voltage input
 *TVDC: terminal block DC-in connector, vehicle SKU, DC voltage input
 *MVDC: M12 DC-in connector, vehicle SKU, DC voltage input
 *TMDC: terminal block DC-in connector, marine SKU, DC voltage input

Optional


Communication Modules	8816N3239A0E	3G UC20GKit for tBOX/UST (3G ANT) (E)
	8816N3235A0E	3G/GPS UC20GKit for tBOX (3G/GPS ANT)
	8812C300CA0E	AP12356WT Wi-Fi kit for IC0300 SFP (E)
	8816N8105A0E	GPS kit M8N w/o adapter for tBOX SFP (E)
	8816N8108A0E	LTE MC7430 (EU) kit for tBOX (E)
	8816N8107A0E	LTE MC7430 (EU) w/GPS kit for tBOX (E)
	8816N5002A0E	LTE MC7455 (US) kit for tBOX/UST SFP (E)
	8816N5001A0E	LTE MC7455 (US) W/GPS kit for UST SFP (E)
AC to DC Adapter	50906D24000E	Adapter 24V/120W, wire only, FSP120-AAAN3
	50966224010E	Adapter 24V 90W, M12 A-code 5P FSP090AAAN3

*Specifications and certifications may vary based on different requirements.

Power Protection

- OCP (over current protection)
- OVP (over voltage protection)
- UVP (under voltage protection)
- RPP (reverse polarity protection)
- ISO 7637-2 pulse 1, 2a, 2b, 3a, 3b, 4 (vehicle version)
- Setting for in-vehicle battery protection: system will be automatically turned down at low voltage level
- Setting for ignition control: system will activate a counter while in-vehicle battery at low voltage, ACC-ON delay and shut down delay

Dimensions

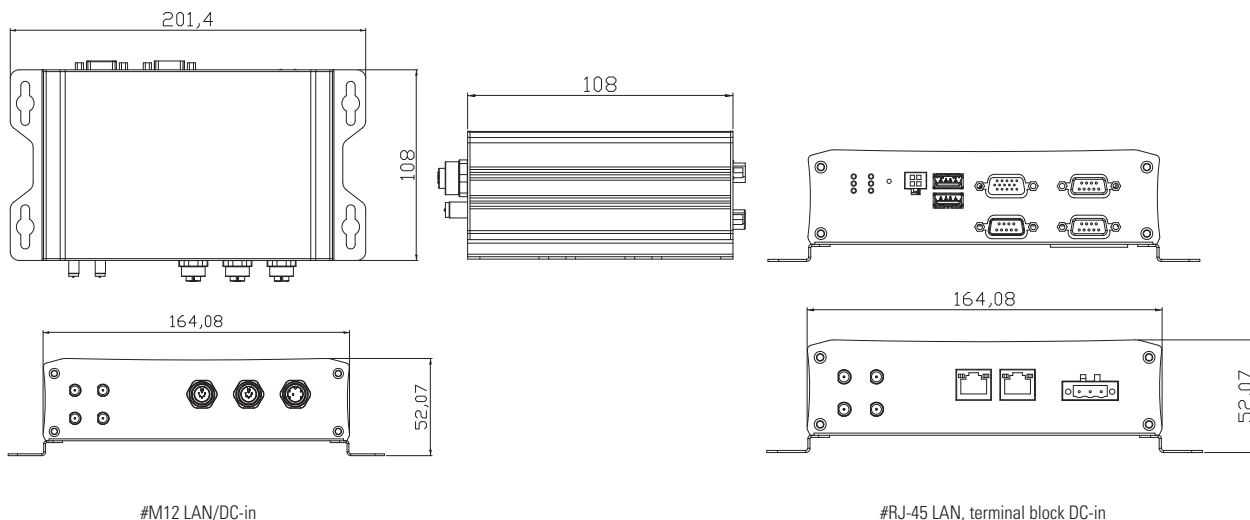

#M12 LAN/DC-in

#RJ-45 LAN, terminal block DC-in