

# IFB112

Robust RISC-based DIN-rail Fanless Embedded System with i.MX 6UL Processor, COM, CANbus, 2 LANs and DIO (2-in/1-out)

## Features

- RISC-based (i.MX 6ULtraLite) processor 528 MHz
- 256MB DDR3 SDRAM onboard
- 4GB eMMC flash onboard
- 1 PCI Express Mini Card slot (Wi-Fi or 3G/4G)
- 1 CAN Bus
- 2 digital inputs and 1 digital output
- 9 to 48 VDC wide range power input with terminal block
- Embedded Linux operating system (Yocto)
- Fanless and compact design
- Wide operating temperature range from -40°C to +70°C




## Introduction

The IFB112 cost-effective DIN-rail fanless embedded system utilizes the low power RISC-based (i.MX 6UL) processor and is designed to withstand temperatures ranging from -40°C to +70°C for using in extreme operating environment and industrial automation applications.


The IFB112 features one RS-232/422/485 serial port, dual LAN, one CANbus, two digital input channels, one digital output channel, LED for user programming and one eMMC onboard 4 GB. Its vertical DIN-rail form factor makes it easy to install the system in a small cabinet. The ready-to-run IFB112 is specially designed for remote control/monitoring management applications like unmanned control room, industrial machine, automatic parking lot, traffic cabinet and more.

## Specifications

Construction	Extruded aluminum and heavy-duty steel, IP40																		
CPU	NXP i.MX 6UL processor, ARM® Cortex®-A7, 528 MHz																		
System Memory	1 x DDR3-1600 onboard, 256 MB																		
System I/O Outlet	<table border="1"> <tr> <td>Serial Port</td> <td>1 x RS-232/422/485 (RS-232/422/485 interface select by software)</td> </tr> <tr> <td>CAN Bus</td> <td>1 x CAN 2.0 B (DB9 connector) Meets ISO 11898 standard Software control termination resistor 120 ohm can high speed up to 1Mbit/s for transmit/receive</td> </tr> <tr> <td>LAN</td> <td>2 x 10/100 Mbps Ethernet Magnetic isolation protection 1.5 KV</td> </tr> <tr> <td>Relay</td> <td>1 x Relay</td> </tr> <tr> <td>USB</td> <td>1 x USB 2.0</td> </tr> <tr> <td>DIO</td> <td>1 x DIO (2-in/1-out) DI: wet/dry DO: wet DI: Input channels: 2 source type Input voltage: 0 to 24 VDC digital input levels for dry contacts: -Logic level 0: close to GND -Logic level 1: open Digital input levels for wet contacts : -Logic level 0: Close to GND -Logic level 1: +0.7 to +24 V max. DO: Output channels: 1, sink type Output current: max. 200 mA per channel On-state voltage: 24 VDC nominal, open</td> </tr> <tr> <td>Console Port</td> <td>Yes For user setting with debug</td> </tr> <tr> <td>EEPROM</td> <td>1 x EEPROM (2 Kb)</td> </tr> <tr> <td>Wireless</td> <td>1 x PCI Express Mini Card slot (USB signal only) 1 x SIM card socket</td> </tr> </table>	Serial Port	1 x RS-232/422/485 (RS-232/422/485 interface select by software)	CAN Bus	1 x CAN 2.0 B (DB9 connector) Meets ISO 11898 standard Software control termination resistor 120 ohm can high speed up to 1Mbit/s for transmit/receive	LAN	2 x 10/100 Mbps Ethernet Magnetic isolation protection 1.5 KV	Relay	1 x Relay	USB	1 x USB 2.0	DIO	1 x DIO (2-in/1-out) DI: wet/dry DO: wet DI: Input channels: 2 source type Input voltage: 0 to 24 VDC digital input levels for dry contacts: -Logic level 0: close to GND -Logic level 1: open Digital input levels for wet contacts : -Logic level 0: Close to GND -Logic level 1: +0.7 to +24 V max. DO: Output channels: 1, sink type Output current: max. 200 mA per channel On-state voltage: 24 VDC nominal, open	Console Port	Yes For user setting with debug	EEPROM	1 x EEPROM (2 Kb)	Wireless	1 x PCI Express Mini Card slot (USB signal only) 1 x SIM card socket
Serial Port	1 x RS-232/422/485 (RS-232/422/485 interface select by software)																		
CAN Bus	1 x CAN 2.0 B (DB9 connector) Meets ISO 11898 standard Software control termination resistor 120 ohm can high speed up to 1Mbit/s for transmit/receive																		
LAN	2 x 10/100 Mbps Ethernet Magnetic isolation protection 1.5 KV																		
Relay	1 x Relay																		
USB	1 x USB 2.0																		
DIO	1 x DIO (2-in/1-out) DI: wet/dry DO: wet DI: Input channels: 2 source type Input voltage: 0 to 24 VDC digital input levels for dry contacts: -Logic level 0: close to GND -Logic level 1: open Digital input levels for wet contacts : -Logic level 0: Close to GND -Logic level 1: +0.7 to +24 V max. DO: Output channels: 1, sink type Output current: max. 200 mA per channel On-state voltage: 24 VDC nominal, open																		
Console Port	Yes For user setting with debug																		
EEPROM	1 x EEPROM (2 Kb)																		
Wireless	1 x PCI Express Mini Card slot (USB signal only) 1 x SIM card socket																		

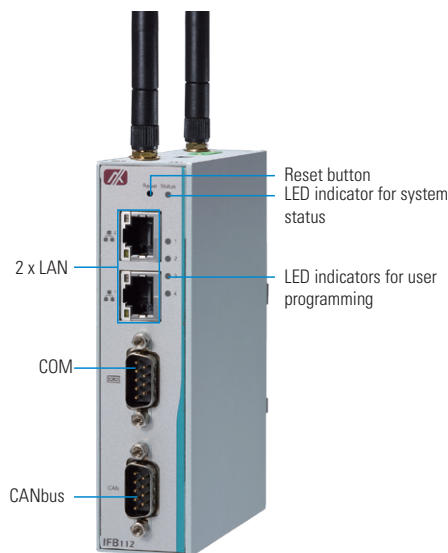

▲ Front view

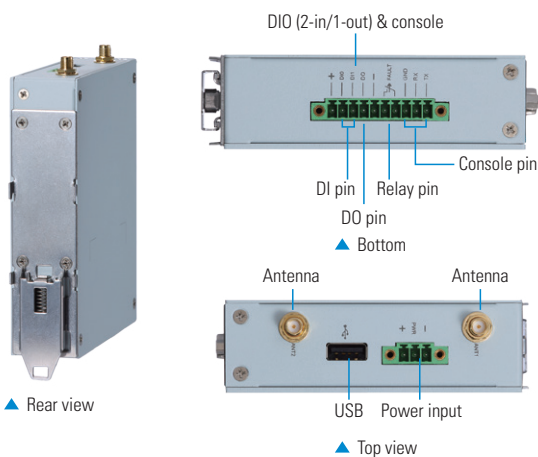

▲ Rear view

▲ Top view

Watchdog Timer	WDT 1: 0.5 to 128 sec. with a time resolution of 0.5 sec.
LEDs	1 x LED for power status 1 x LED for reset status 4 x LED (programming by client)
Storage	1 x eMMC 4GB flash onboard
Power Supply	9 to 48VDC power input range
Operating Temperature	-40°C to +70°C (-40°F to +158°F)
Storage Temperature	-45°C to +85°C (-49°F to +185°F)
Humidity	10% to 95%
Vibration Endurance	3 Gms @ (10 to 150Hz sine wave; operation)
Dimensions	31 mm (1.22") (W) x 100 mm (3.94") (D) x 125 mm (4.92") (H)
Weight (net/gross)	0.3 kg (0.66 lb)/0.44 kg (0.97 lb)
Installation	DIN-rail, wall mount
OS Linux	OS : Yocto 1.8.1 (Fido) Kernel: 3.14.52
Certifications	FCC part 15, Heavy Industrial CE

## Ordering Information

Standard	
IFB112-FL-DC (P/N: E26V112100)	Robust DIN-rail fanless embedded system with i.MX 6UL processor, COM, CANbus, 2 LANs and DIO (2-in/1-out) (-40°C to +70°C)

Optional	
Wall mount kit	
Wireless (3G/GPS or Wi-Fi) module	

## Packing list

- 1 x CD
- 4 x Screws
- 1 x Din-rail kit
- 1 x Console cable
- 1 x 3-pin terminal block for power port
- 1 x 10-pin terminal block for DIO port

\* Specifications and certifications may vary based on different requirements.

## Dimensions

