


FRONT VIEW


Pin #	Assignment
1	Bottom
2	Right
3	Top
4	Left

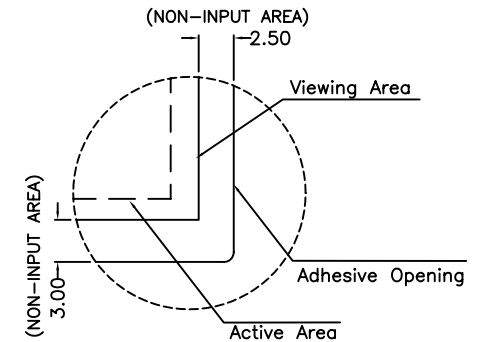

DETAIL A

NOTES:

1. ITO GLASS THICKNESS : 1.80mm (Chemically Strengthened Glass)
2. OVERALL THICKNESS : 2.90±0.20mm
3. CONNECTOR AND PINOUT AS INDICATED
4. TOP GLASS SURFACE TYPE : CLEAR
5. LAYER TO LAYER ASSEMBLY TOLERANCE : ±0.50mm
6. TAIL TYPE : IMMERSION GOLD PLATED FPC WITH AMP-C (WITH LATCH) CONNECTOR
7. EVENED OUT GLASS EDGES
8. OTHER SPEC : SEE APPROVAL SHEET

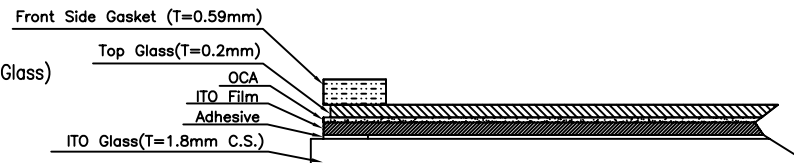

DETAIL B



NO.	DATE	DESCRIPTION	CHK
REVISION			
CHIEF OF DESIGN		APPROVED	Alex
ENGINEER		PROJECT MANAGER	
DRAWN BY	Denise	DATE	JAN.21, 2009
SHT	1 OF 1	REV.	

Apex Material Technology Corp.

TOLERANCES UNLESS SPECIFIED		MODEL NAME : 16000
.X	± 0.50	DWG NO :16000-0-011
.XX	± 0.50	
.XXX	± 0.30	
ANGULAR	.	SCALE: 1:1 UNIT: mm