

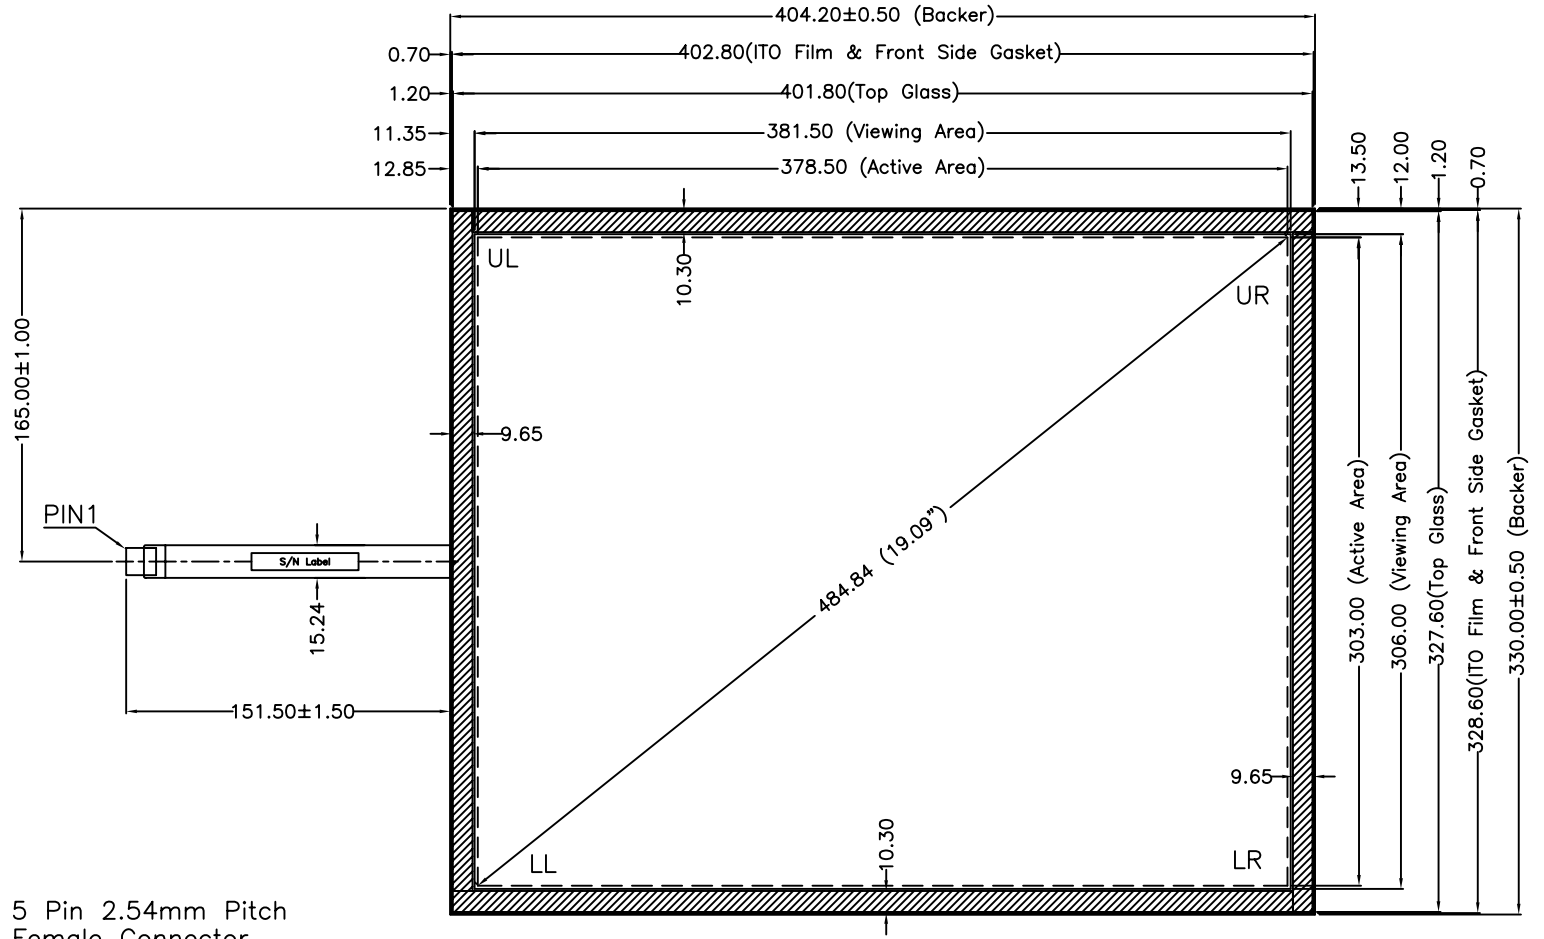


FRONT VIEW

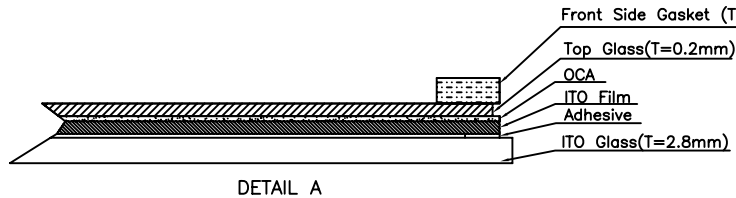

Pin#	Assignment
1	UR
2	LR
3	S
4	UL
5	LL

5 Pin 2.54mm Pitch Female Connector

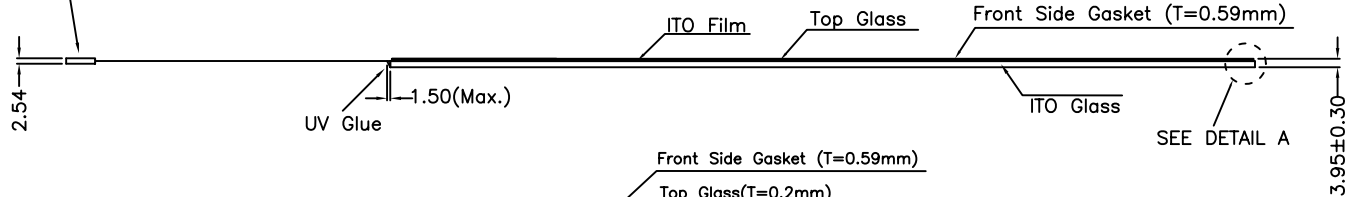

NOTES:

1. ITO GLASS THICKNESS : 2.80mm
2. OVERALL THICKNESS : 3.95±0.30mm
3. CONNECTOR AND PINOUT AS INDICATED
4. TOP GLASS SURFACE TYPE: CLEAR
5. LAYER TO LAYER ASSEMBLY TOLERANCE: ±0.50mm
6. TAIL TYPE : IMMERSION GOLD PLATED FPC WITH AMP-C TIN PLATED CONTACTS
7. EVENED OUT GLASS EDGES
8. OTHER SPEC : SEE APPROVAL SHEET



NO.	DATE	DESCRIPTION	CHK
REVISION			
CHIEF OF DESIGN		APPROVED	Alex
ENGINEER		PROJECT MANAGER	
DRAWN BY	Denise	DATE	JAN.21, 2009
SHT	1	OF	1
REV.			

Apex Material Technology Corp.

TOLERANCES UNLESS SPECIFIED		MODEL NAME : 16001
.X	± 0.50	DWG NO : 16001-0-011
.XX	± 0.50	
.XXX	± 0.30	
ANGULAR	.	SCALE: 1:1 UNIT: mm