
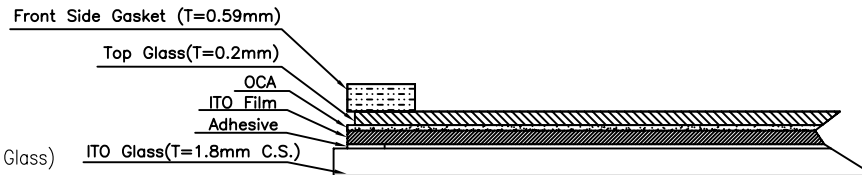
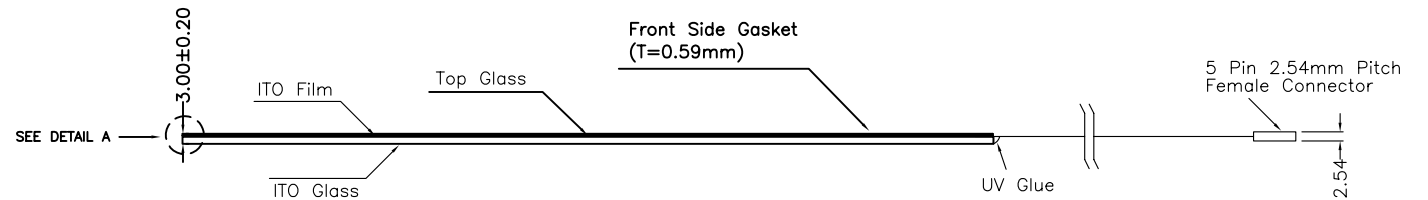


FRONT VIEW

CONNECTOR PINOUT	
PIN#	DESIGNATION
1	UR
2	LR
3	S
4	UL
5	LL

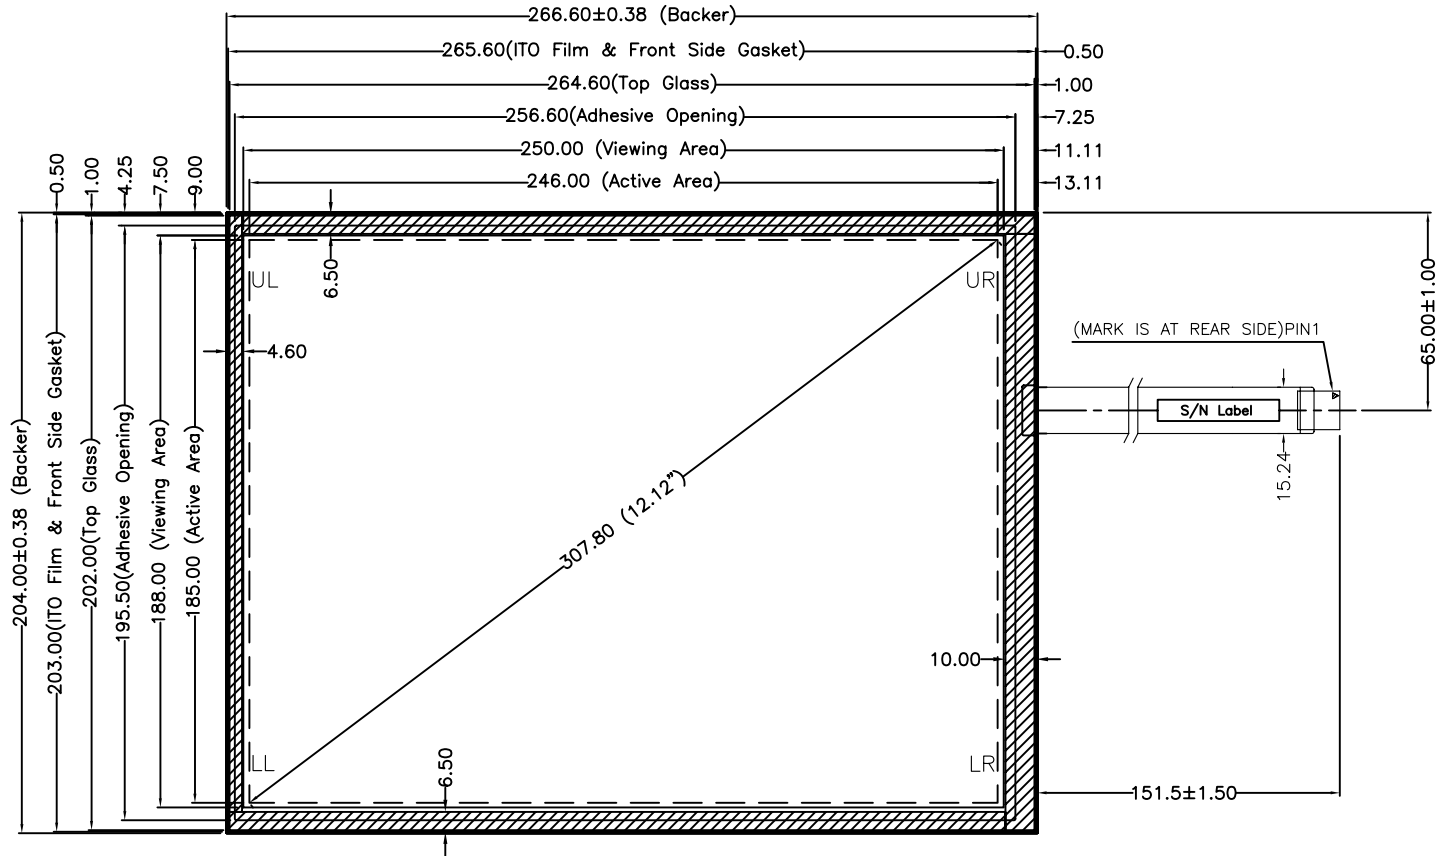

NOTES:

1. ITO GLASS THICKNESS : 1.80mm (Chemically Strengthened Glass)
2. OVERALL THICKNESS : 3.00 ±0.20mm
3. CONNECTOR AND PINOUT AS INDICATED
4. TOP GLASS SURFACE TYPE: CLEAR
5. LAYER TO LAYER ASSEMBLY TOLERANCE: ±0.50mm
6. TAIL TYPE : IMMERSION GOLD PLATED FPC WITH AMP-C CONNECTOR
7. EVENED OUT GLASS EDGES
8. OTHER SPEC : SEE APPROVAL SHEET

DETAIL A



NO.	DATE	DESCRIPTION	CHK
REVISION			
CHIEF OF DESIGN		APPROVED	Alex
ENGINEER		PROJECT MANAGER	
DRAWN BY	Denise	DATE	JAN.21, 2009
SHT	1	OF	1
		REV.	

Apex Material Technology Corp.

TOLERANCES UNLESS SPECIFIED		MODEL NAME :
.X	± 0.50	16003
.XX	± 0.50	DWG NO : 16003-0-011
.XXX	± 0.30	
ANGULAR	.	SCALE: 1:1 UNIT: mm