


Pin#	Assignment
1	UR
2	LR
3	S
4	UL
5	LL



NOTES:

1. ITO GLASS THICKNESS : 2.80mm
2. OVERALL THICKNESS :  $3.30 \pm 0.30$ mm
3. CONNECTOR AND PINOUT AS INDICATED
4. FRONT SURFACE : ANTI-GLARE HARDCOAT
5. LAYER TO LAYER ASSEMBLY TOLERANCE:  $\pm 0.50$ mm
6. TAIL TYPE : IMMERSION GOLD PLATED FPC WITH AMP-C TIN PLATED CONTACTS
7. OTHER SPEC : SEE APPROVAL SHEET

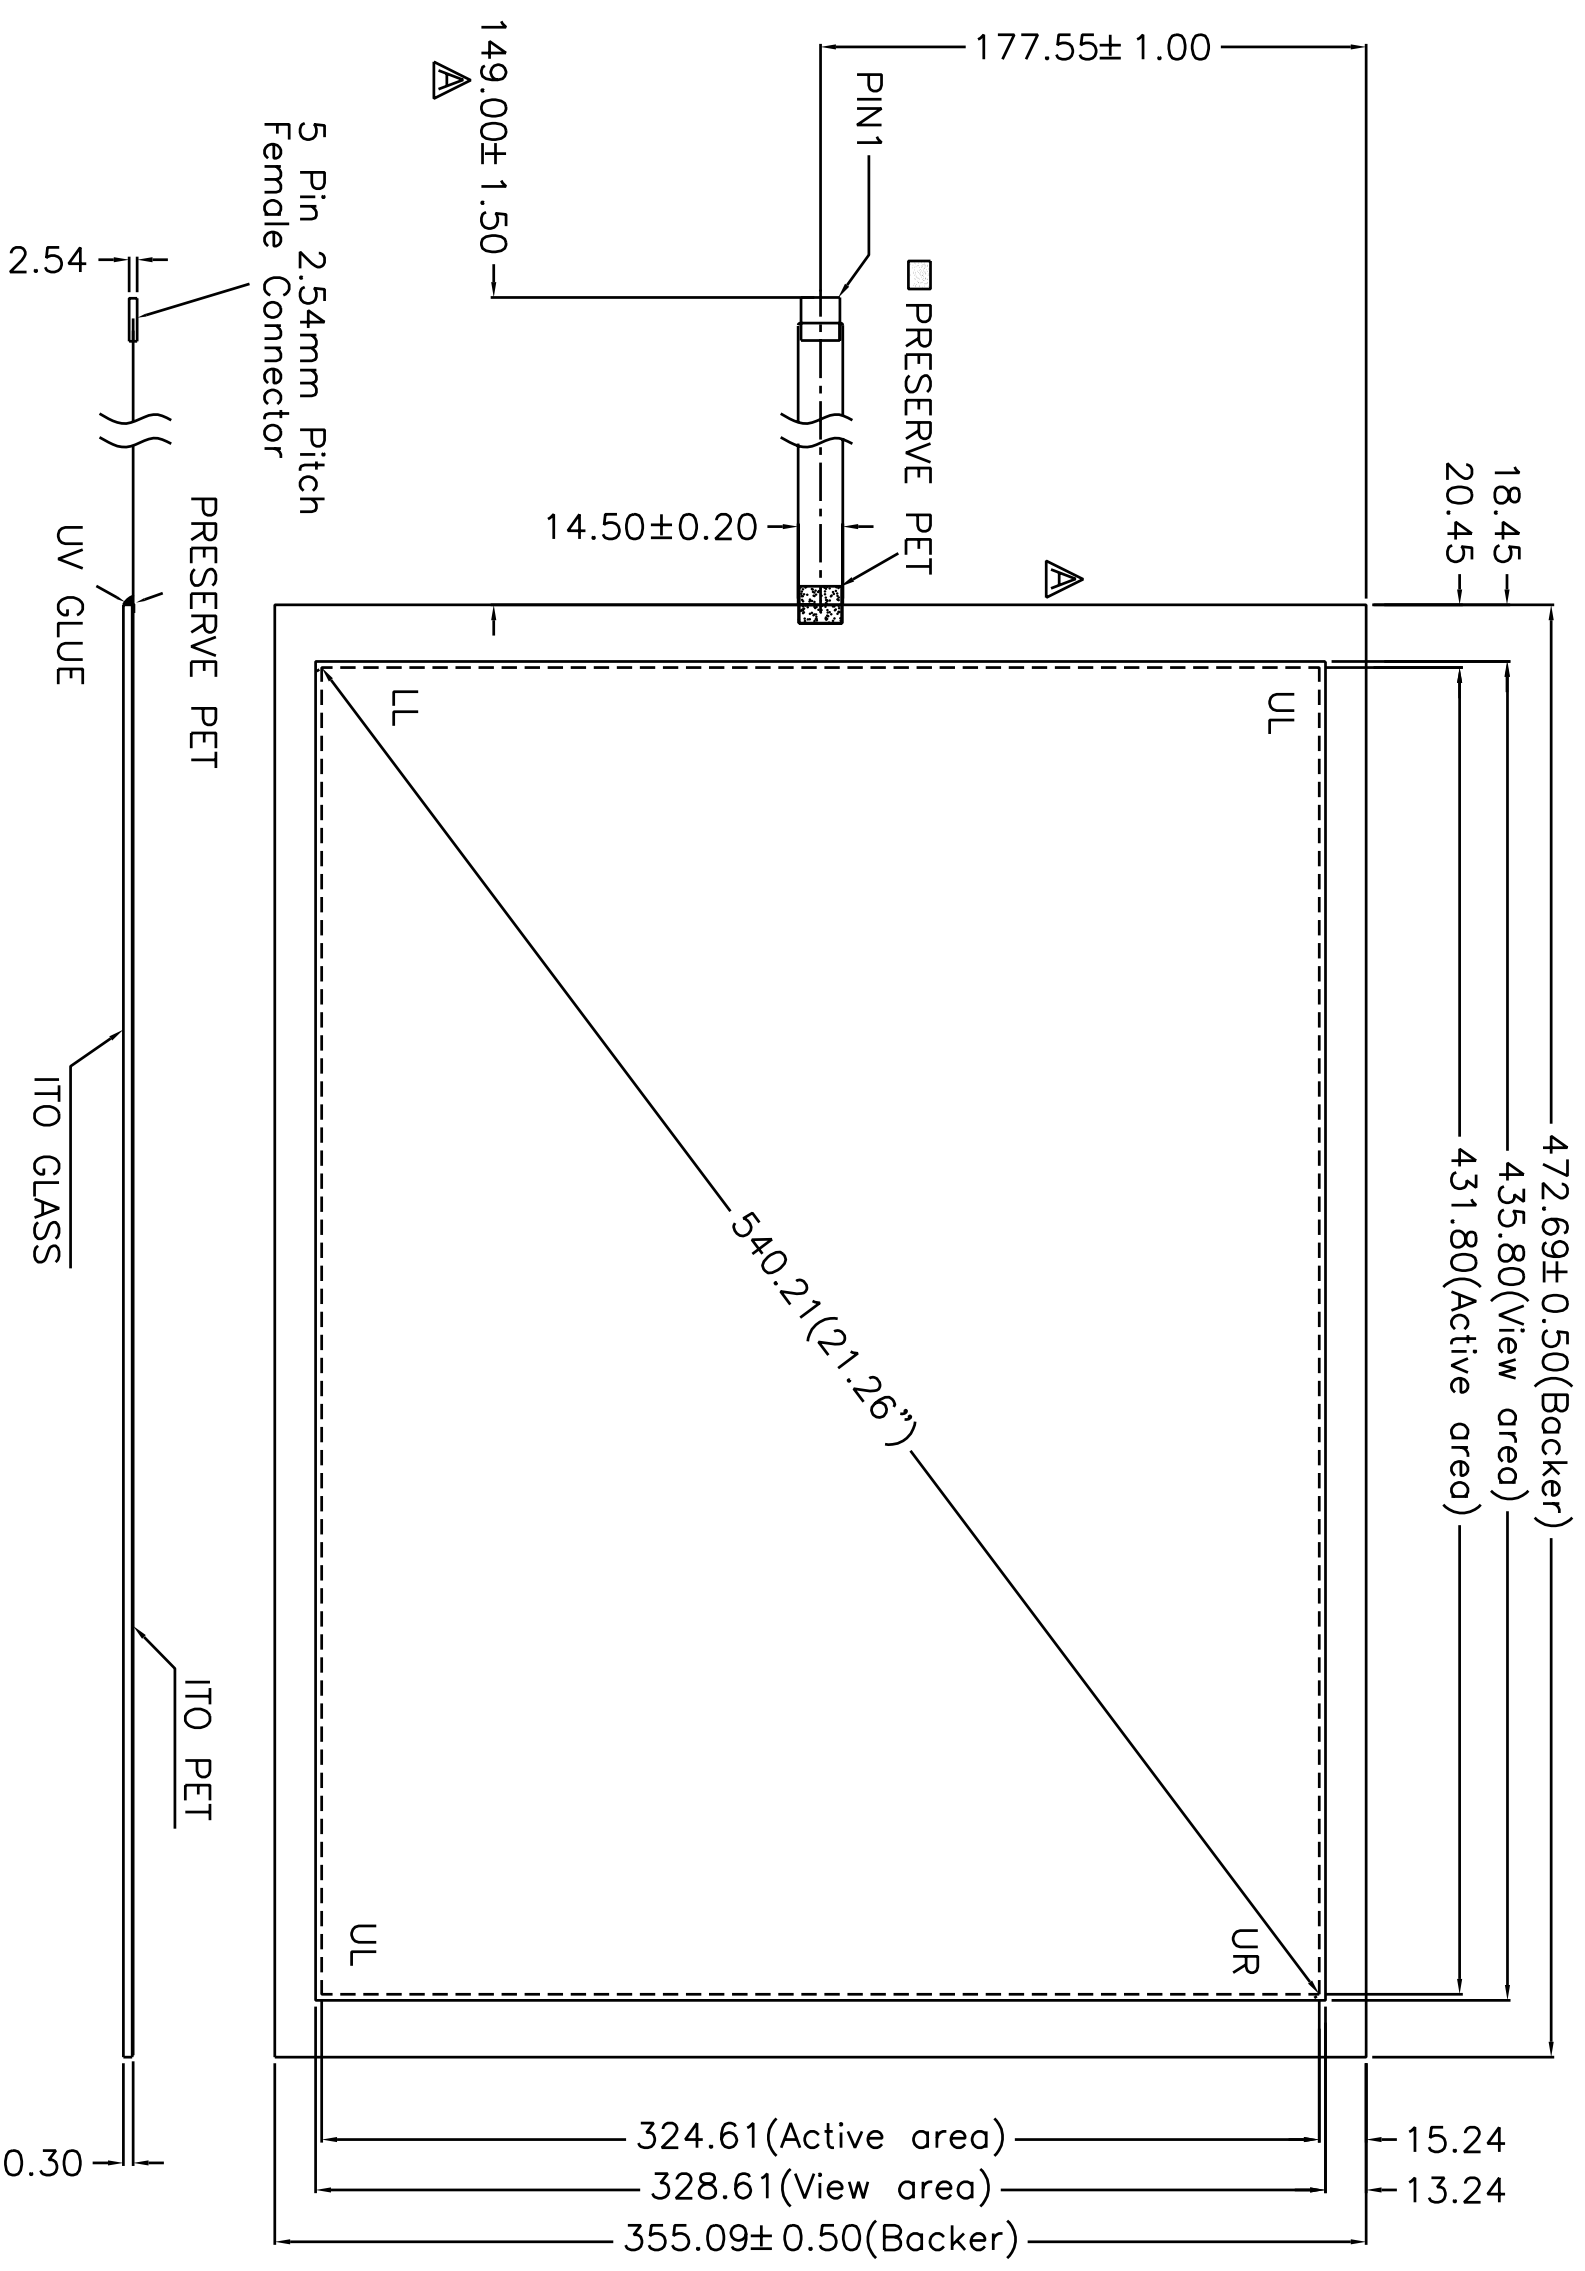

REVISION		Apex Material Technology Corp.	
NO.	DATE	DESCRIPTION	CHK
A	Jun.13.07	Pattern & tail modified	Alex
CHIEF OF DESIGN		APPROVED	Alex
ENGINEER		PROJECT NUMBER	
DRAWN BY		DATE	Jun.13.2007
SHT 1 OF 1		REV.	A
TOLERANCES UNLESS SPECIFIED		MODEL NAME: 2518	
X	$\pm 0.50$	DWG NO : 2518-1-01	
XX	$\pm 0.50$	SCALE: 1:1 UNIT: mm	
.XXX	$\pm 0.30$		
ANGULAR			