


Pin#	Assignment
1	Bottom
2	Bottom sense
3	Top sense
4	Top
5	Left
6	Left sense
7	Right sense
8	Right

FRONT VIEW

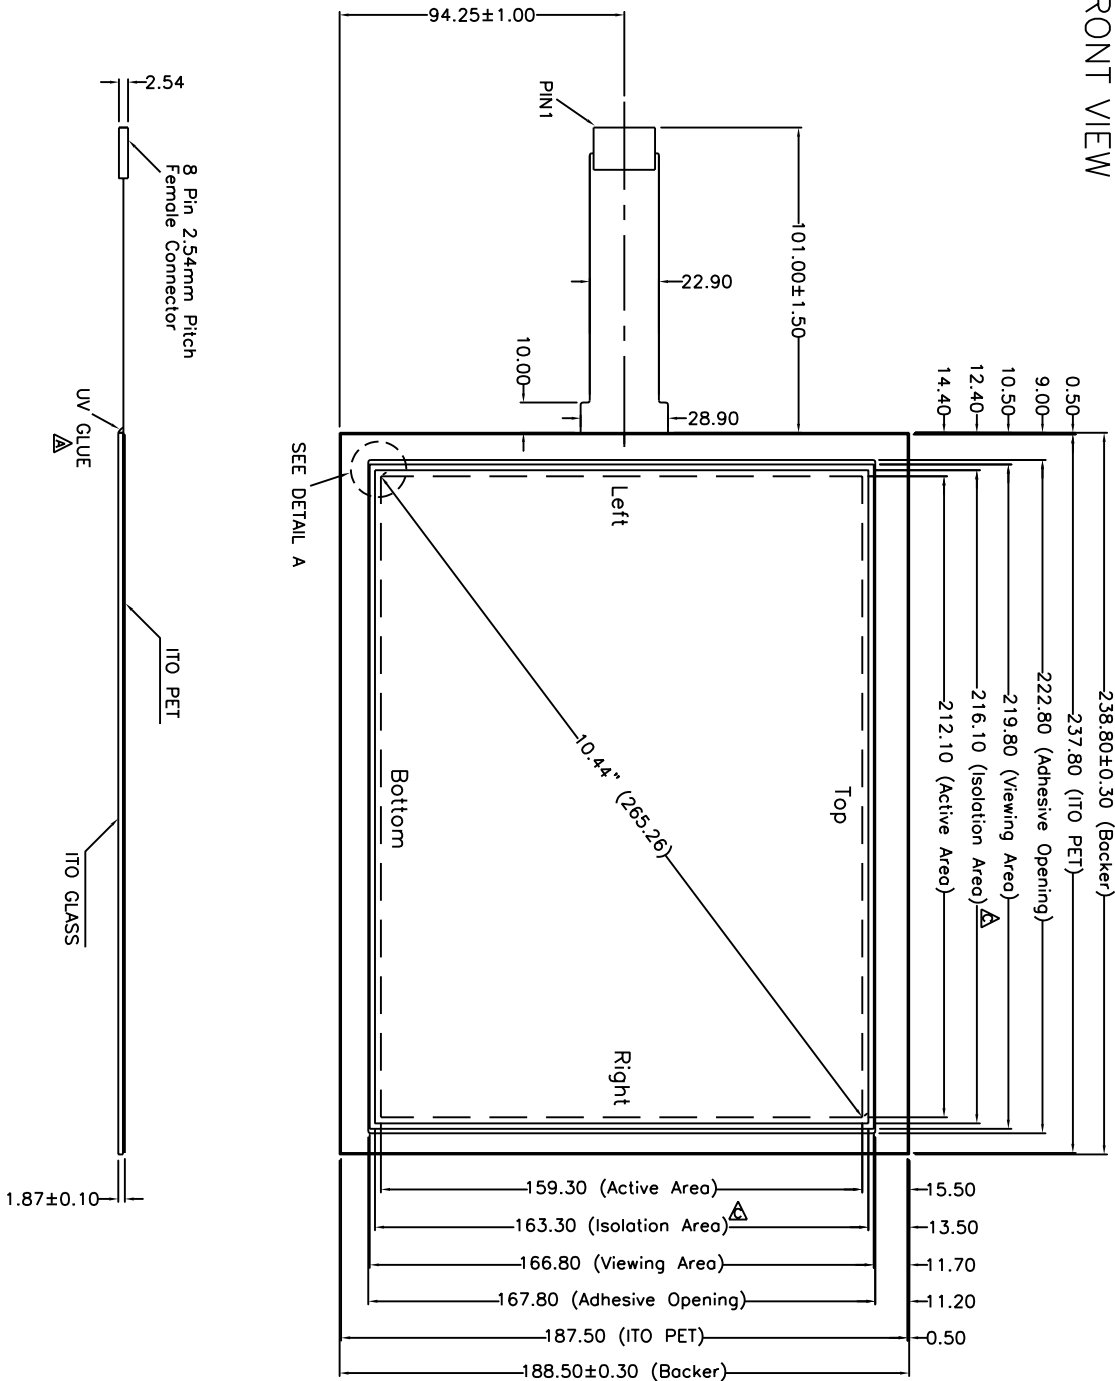

DETAIL A

- NOTES:
1. ITO GLASS THICKNESS : 1.57mm
 2. OVERALL THICKNESS : 1.87 ± 0.10 mm
 3. CONNECTOR AND PINOUT AS INDICATED
 4. FRONT SURFACE : ANTI-GLARE HARDCOAT
 5. LAYER TO LAYER ASSEMBLY TOLERANCE: ± 0.50 mm
 6. TAIL TYPE : IMMERSION GOLD PLATED FPC WITH AMP-C TIN PLATED CONTACTS
 7. OTHER SPEC : SEE APPROVAL SHEET



NO.	DATE	REVISION	DESCRIPTION	CHK
C	AUG 28, 2006		INCREASE ISOLATION AREA	ALEX
B	JUNE 27, 2006		MODIFY CIRCUIT & TAIL TYPE	ALEX
A	SEP 29, 2004		ADD UV GLUE TO TAIL LOCATION	ALEX

Apex Material Technology Corp.

CHIEF OF DESIGN	APPROVED	DATE	TOLERANCES UNLESS SPECIFIED	PROJECT NAME
Jerry	Alex	AUG 28, 2006	.X ± 0.50	9518
ENGINEER	PROJECT NUMBER	DATE	.XX ± 0.50	DMG NO : 9518-3-01
DRAWN BY	REV.		.XXX ± 0.30	SCALE: 1:1
SHT 1 OF 1			ANGULAR	UNIT: mm