



FRONT VIEW

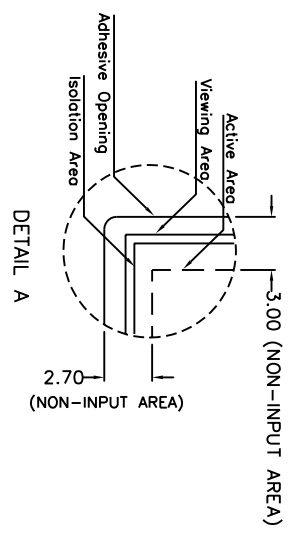

| Pin # | Assignment |
|-------|--------------|
| 1 | Right |
| 2 | Right sense |
| 3 | Left sense |
| 4 | Left |
| 5 | Bottom |
| 6 | Bottom sense |
| 7 | Top sense |
| 8 | Top |

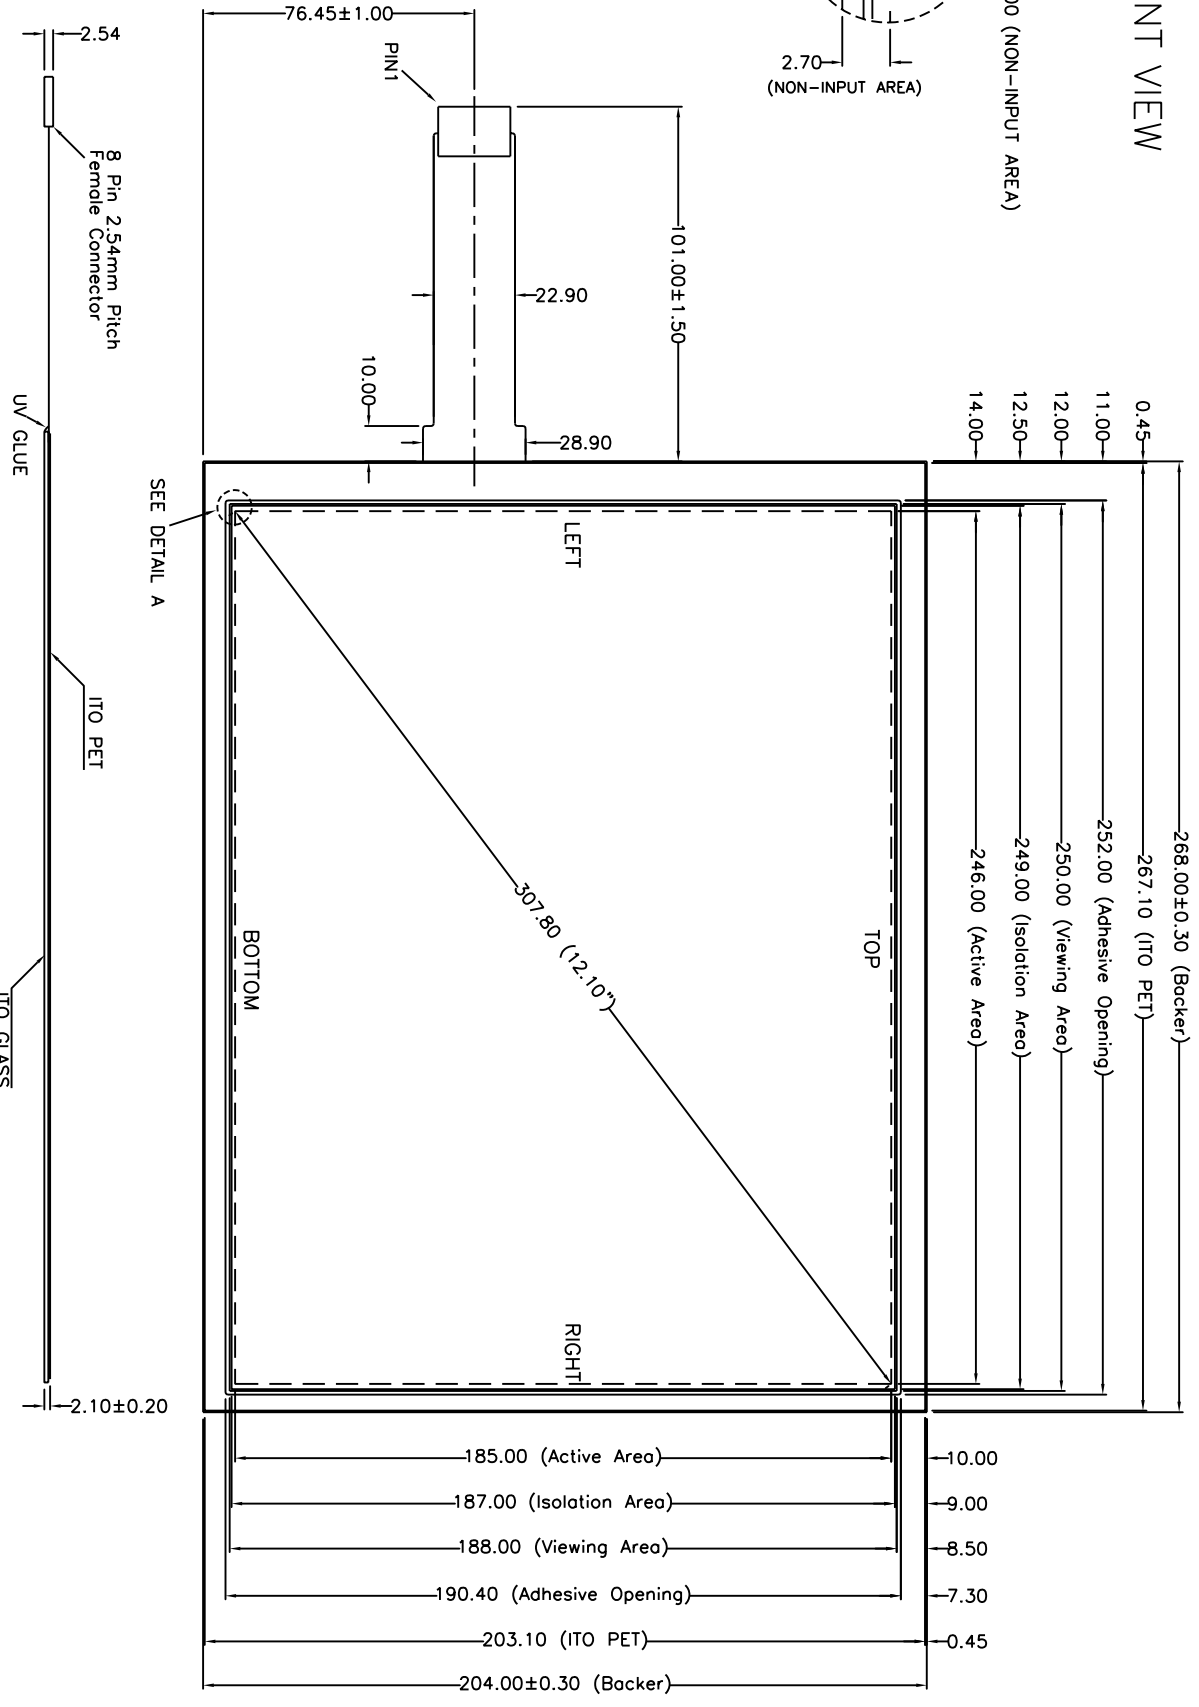

NOTES:

1. ITO GLASS THICKNESS : 1.80mm
2. OVERALL THICKNESS : 2.10±0.20mm
3. CONNECTOR AND PINOUT AS INDICATED
4. FRONT SURFACE : ANTI-GLARE HARDCOAT
5. LAYER TO LAYER ASSEMBLY TOLERANCE: ±0.50mm
6. TAIL TYPE : IMMERSION GOLD PLATED FPC WITH AMP-C TIN PLATED CONTACTS
7. OTHER SPEC : SEE APPROVAL SHEET



| A | NO. | DATE | DESCRIPTION | CHK |
|---|-------------|----------------------------|-------------|-----|
| 1 | SEP 5, 2006 | MODIFY CIRCUIT & TAIL TYPE | ALEX | CHK |

| DESIGNER | DATE | REV. |
|----------|--------------|------|
| Jerry | JAN 26, 2006 | A |

Apex Material Technology Corp.

| TOLERANCES UNLESS SPECIFIED | PRODUCT NAME : |
|-----------------------------|---------------------|
| .X ± 0.50 | 9534 |
| .XX ± 0.50 | DWG NO : 9534-1-011 |
| .XXX ± 0.30 | SCALE: 1:1 |
| ANGULAR | UNIT: mm |