


FRONT VIEW

Pin#	Assignment
1	Top
2	Top sense
3	Bottom sense
4	Bottom
5	Left
6	Left sense
7	Right sense
8	Right

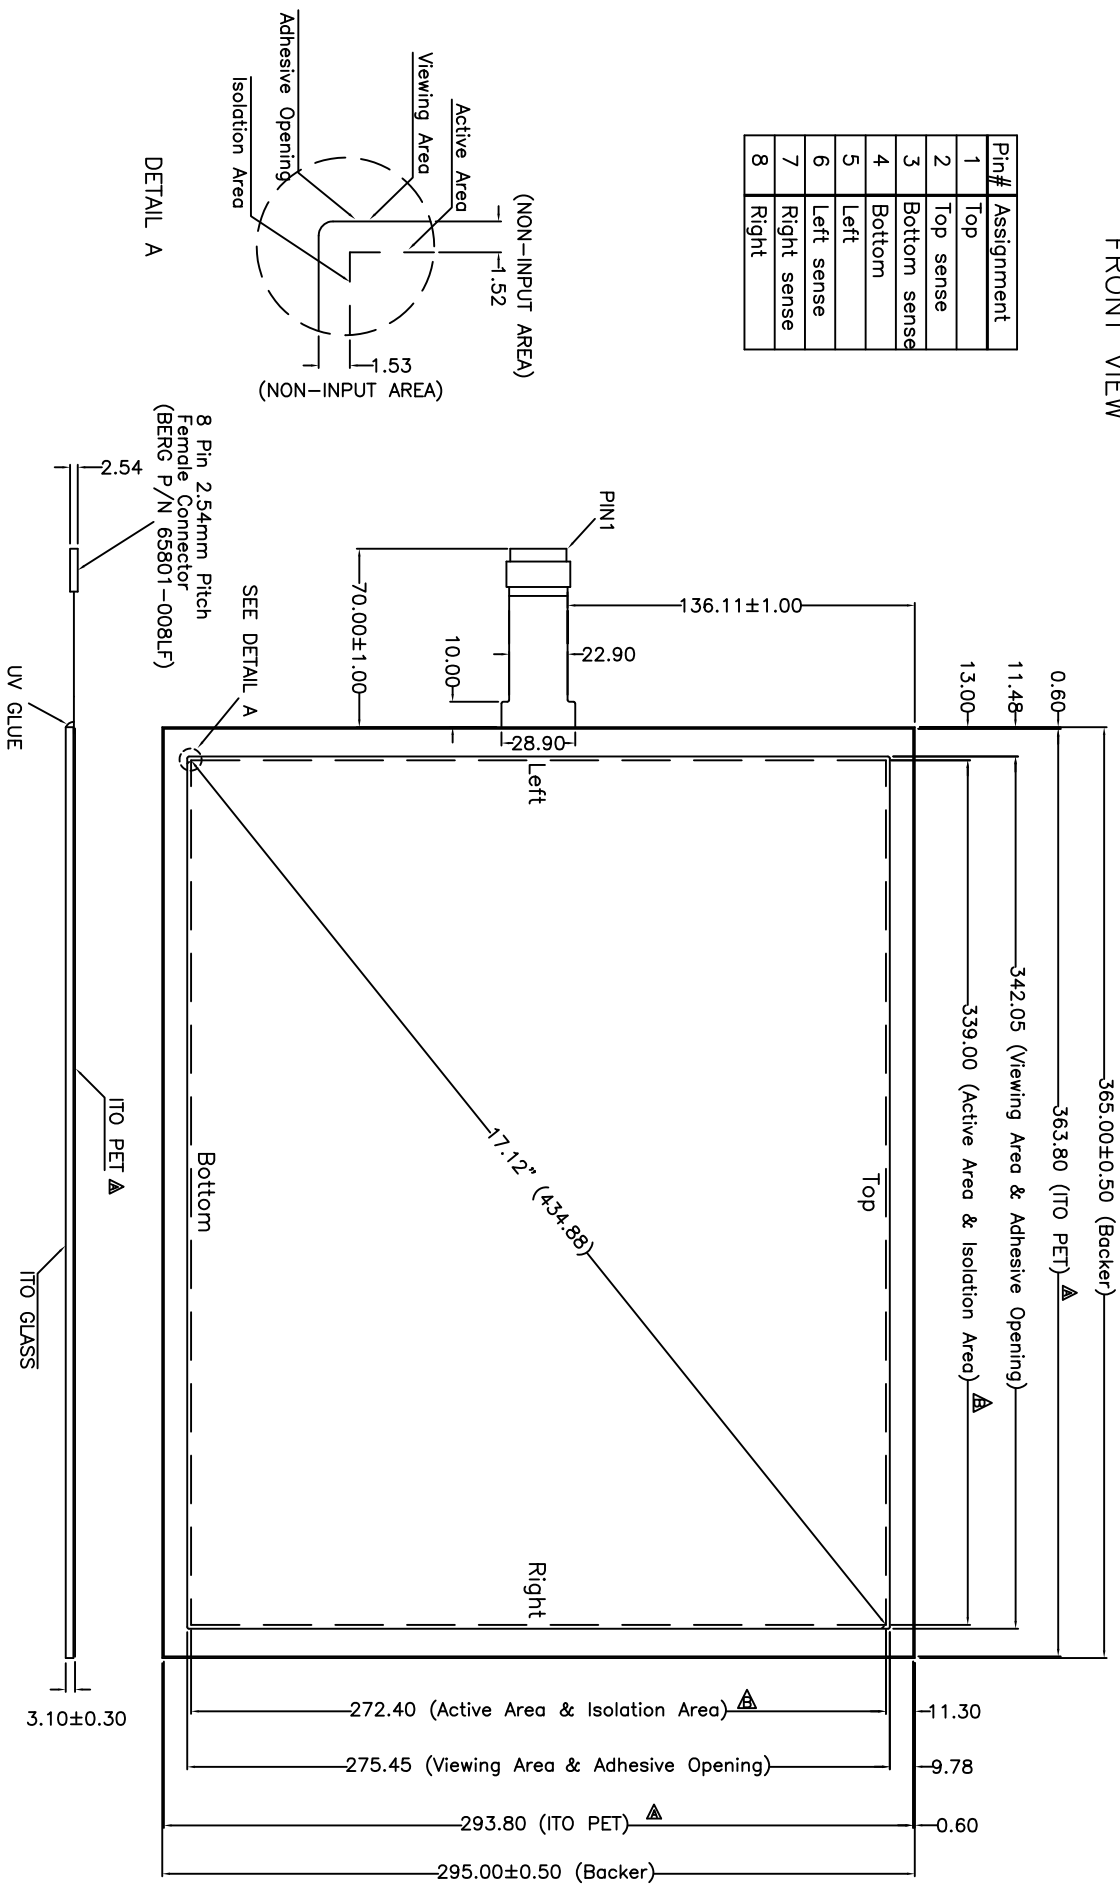

DETAIL A

8 Pin 2.54mm Pitch
Female Connector
(BERG P/N 65801-008LF)

- NOTES:
1. ITO GLASS THICKNESS : 2.80mm
 2. OVERALL THICKNESS : 3.10±0.30mm
 3. CONNECTOR AND PINOUT AS INDICATED
 4. FRONT SURFACE : ANTI-GLARE HARDCOAT
 5. LAYER TO LAYER ASSEMBLY TOLERANCE: ±0.50mm
 6. TAIL TYPE : IMMERSION GOLD PLATED FPC WITH BERG CONNECTOR
 7. CONNECTOR : BERG P/N 65801-008LF
 8. OTHER SPEC : SEE APPROVAL SHEET



NO.	DATE	REVISION	DESCRIPTION	CHK
B	Jul 31, 2007		ISOLATION AREA & ISOLATION MATERIAL MODIFY	Alex
A	Apr 9, 2006		ITO PET MODIFY	Alex

CHIEF OF DESIGN	APPROVED	DATE	PROJECT NUMBER
	Alex	OCT 22, 2007	

ENGINEER	DATE	REV.	ANGULAR
Grace		B	

TOLERANCES UNLESS SPECIFIED	MODEL NAME :
X ± 0.50	9547
XX ± 0.50	DWG NO 9547-2-011
XXX ± 0.30	

SCALE:	UNIT:
1:1	mm

Apex Material Technology Corp.