




FRONT VIEW

Pin #	Assignment
1	Bottom
2	Left
3	Top
4	Right

0.50	358.50±0.30 (Backer)	0.50
7.50	357.50 (ITO Film)	13.83
8.30	343.50(Adhesive Opening)	12.83
9.29	341.90 (Viewing Area)	11.80
10.29	339.92 (Isolation Area)	10.00
	337.92 (Active Area)	0.50

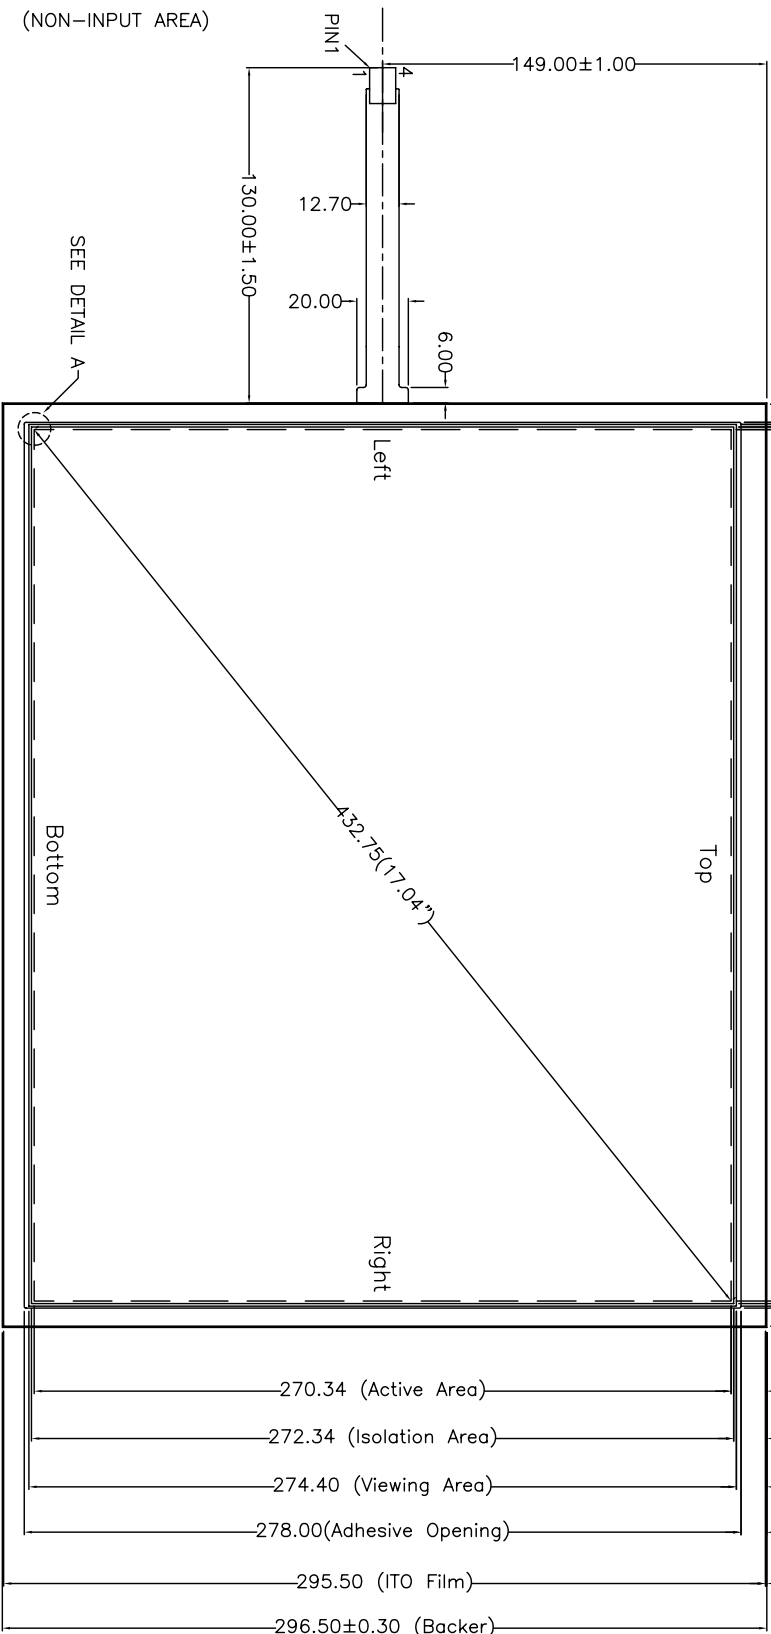

DETAIL A

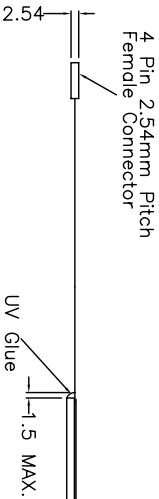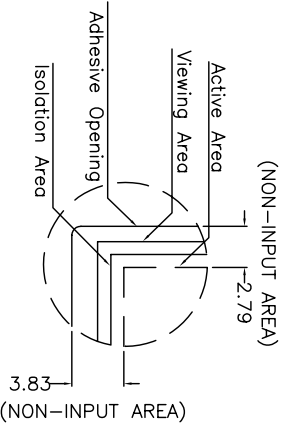

NOTES:

1. ITO GLASS THICKNESS : 1.80mm
2. OVERALL THICKNESS : 2.10±0.20mm
3. CONNECTOR AND PINOUT AS INDICATED
4. FRONT SURFACE : ANTI-GLARE HARDCOAT
5. LAYER TO LAYER ASSEMBLY TOLERANCE: ±0.50mm
6. TAIL TYPE : IMMERSION GOLD PLATED FPC WITH AMP-C TIN PLATED CONTACTS
7. OTHER SPEC : SEE APPROVAL SHEET



NO.	DATE	DESCRIPTION	CHK
REVISION			
CHIEF OF DESIGN		APPROVED	Alex
ENGINEER		PROJECT MANAGER	
DRAWN BY	Grace	DATE	NOV 28 2007
SHT	1 OF 1	REV.	

Apex Material Technology Corp.

TOLERANCES UNLESS SPECIFIED		MODEL NAME : 9549
.X	± 0.50	DWG NO : 9549-0-011
.XX	± 0.50	SCALE: 1:1
.XXX	± 0.30	UNIT: mm
ANGULAR		