


FRONT VIEW

Pin #	Assignment
1	BOTTOM
2	TOP
3	LEFT
4	RIGHT

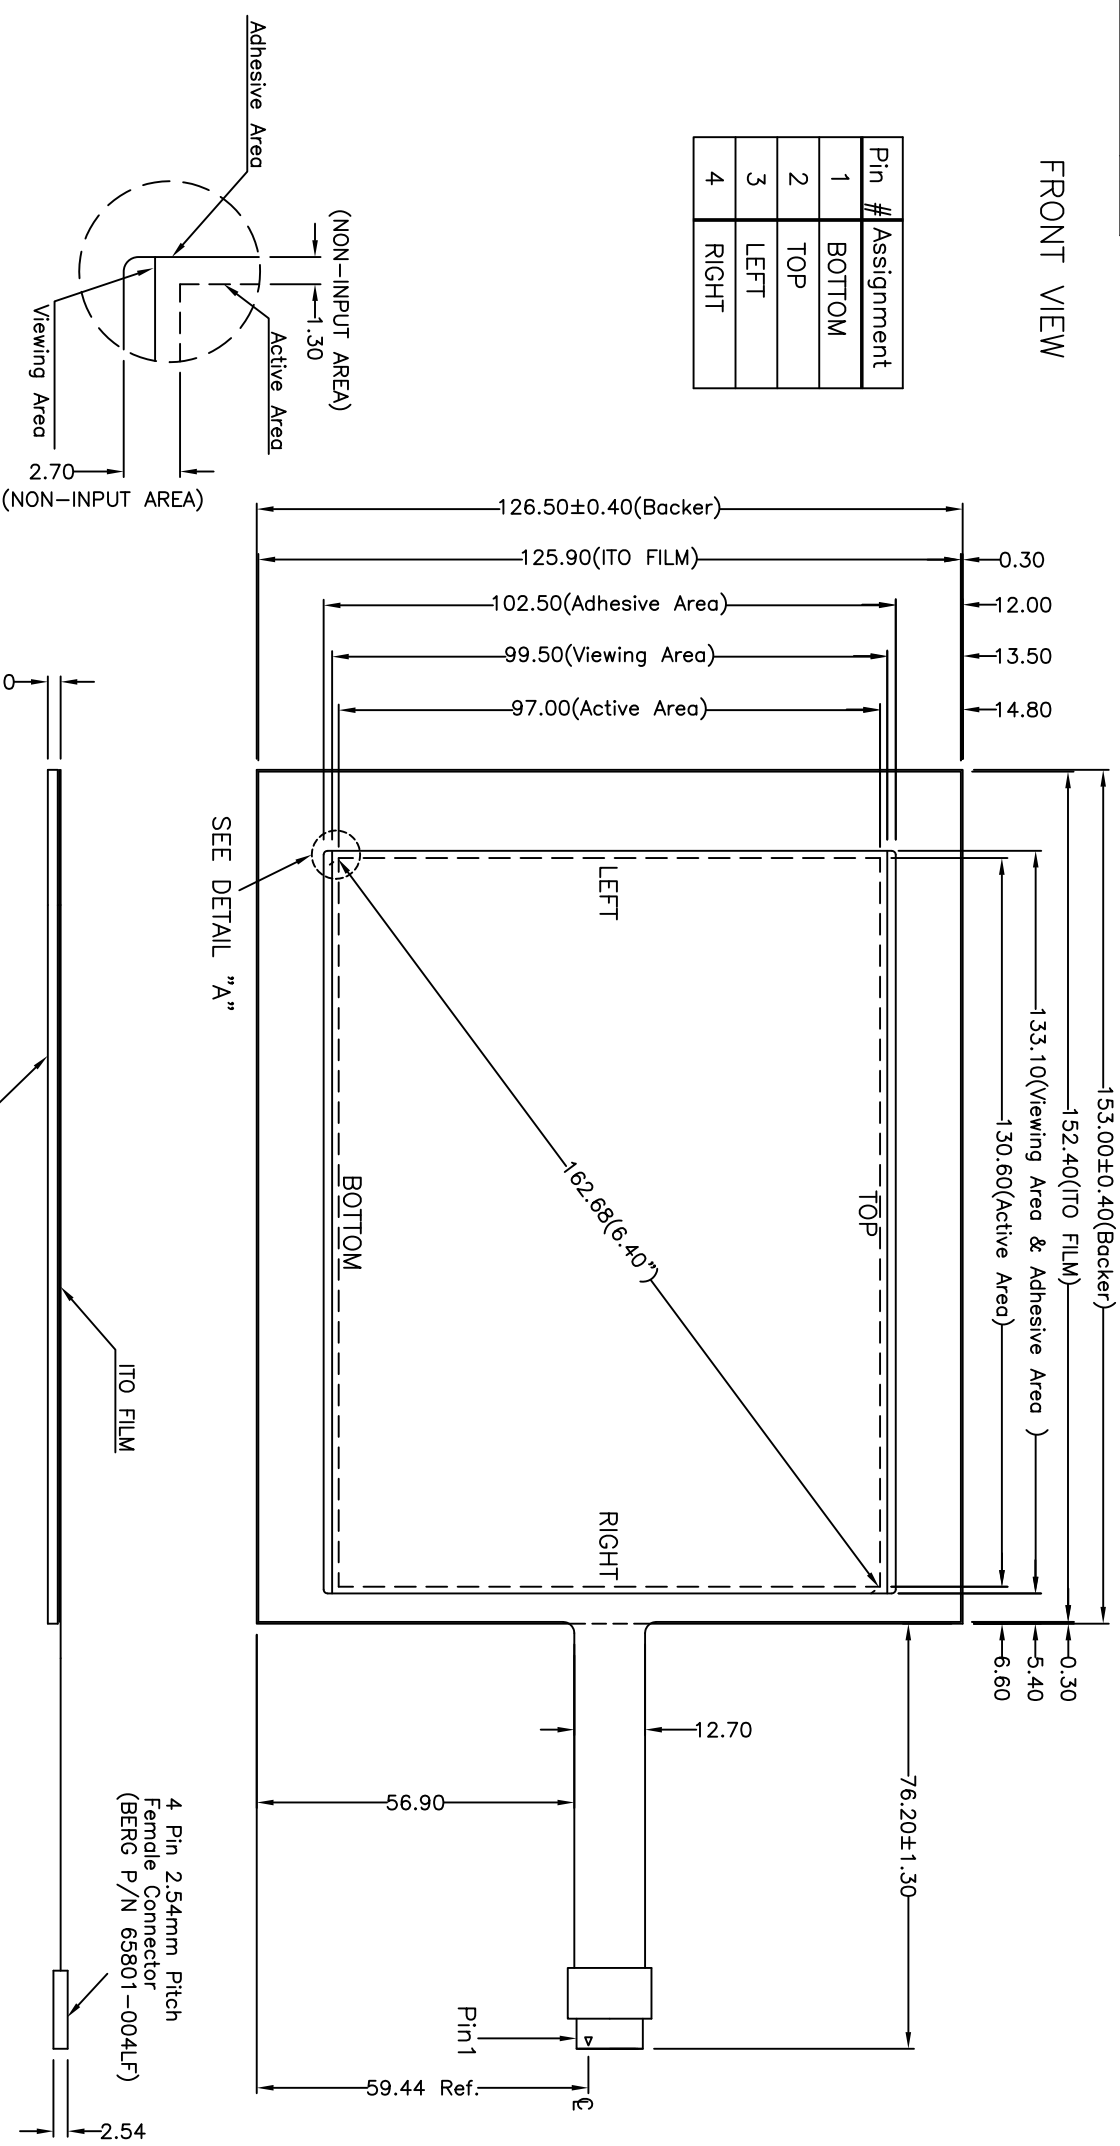

DETAIL "A"

NOTES:

1. ITO GLASS THICKNESS : 1.10mm (C.S)
2. OVERALL THICKNESS : 1.40±0.10mm
3. CONNECTOR AND PINOUT AS INDICATED
4. FRONT SURFACE : ANTI-GLARE HARDCOAT
5. LAYER TO LAYER ASSEMBLY TOLERANCE: ±0.30mm
6. TAIL TYPE : INTEGRAL PET FILM WITH BERG CONNECTOR
7. BERG CONNECTOR P/N: 65801-004LF
8. OTHER SPEC : SEE APPROVAL SHEET



NO.	DATE	REVISION	DESCRIPTION	CHK

CHIEF OF DESIGN	APPROVED	Alex
ENGINEER	PROJECT NUMBER	
DRAWN BY	DATE	OCT 17, 2007
SHT 1 OF 1	REV.	

TOLERANCES UNLESS SPECIFIED		MODEL NAME : 9550
X	± 0.50	DWG NO : 9550-0-012
.XX	± 0.50	SCALE: 1:1
.XXX	± 0.50	UNIT: mm
ANGULAR		

Apex Material Technology Corp.

4 Pin 2.54mm Pitch  
Female Connector  
(BERG P/N 65801-004LF)