

The Remote Player 400 (RP-400) is a digital video and audio player designed for High Definition (HD) video playback of MPEG-2 and still pictures on TV and video monitors in commercial environments. The videos are stored and played back directly from a built-in hard drive.

**Playback media formats :** NTSC & PAL video MPEG-1, MPEG-2, MPEG-4, JPEG still images  
HD (720p) video with MPEG-2 encoded

**Video & Audio Output :** Analog VGA , Stereo audio



LAN

RS-232

720p

JPEG

MPEG-4

MPEG-2

MPEG-1

## FEATURES :

### Display Output :

The video can be displayed on TV, LCD and Plasma monitors supporting VGA with 1280 x 720p.

### Storage Media :

SATA hard drive with 120G storage size.

### Audio Output :

Stereo line out jack

### Playback modes :

A range of playback modes can be set:

*Playlist/Default:* Video tracks play according to a playlist created with DV Studio or in filename alphanumeric order.

*Loop:* An individual file or group of files can be set to loop continuously.

### Interactivity :

A range of interactive options are available including barcode scan, RS-232 protocol control, buttons as well as innovative switching options.

### USB support :


USB ports are provided at the front and rear panel for content updates.

### Data Logging :

The log files are created containing a cumulative log of events that lists the date, time and track that was played.

### Remote Control and Communications :

Utilising the Digital View Content Management system, content can be changed and managed remotely.

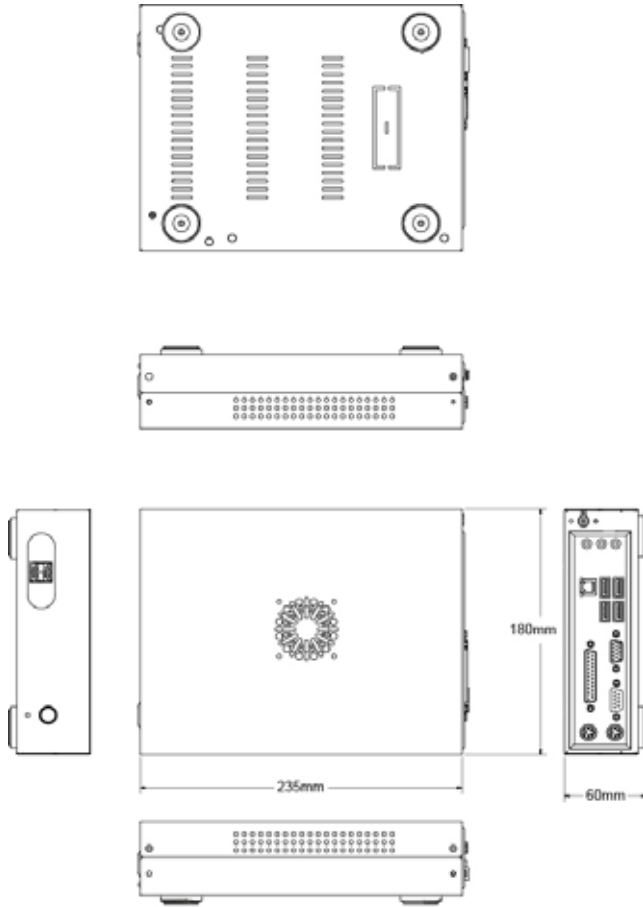

#### Ordering Information

Part No.	Model
586004000-3	Remote Player 400

# SPECIFICATION

#### Playable Format

Video : MPEG-1 (352x288, PAL, 25fps)  
 : MPEG-1 (352x240, NTSC, 29.97fps)  
 : MPEG-2 (720x576, PAL, 25fps)  
 : MPEG-2 (720x480, NTSC, 29.97fps)  
 : MPEG-2 (1280x720)\*  
 : MPEG-4 (720x576, PAL, 25fps)  
 : MPEG-4 (720x480, NTSC, 29.97fps)  
 JPEG : 1280 x 720 resolution  
 Audio : 44.1kHz Stereo, 224kbit/s  
 Codec : MPEG-1, MPEG-2 (.mpg)  
 : MPEG-4 (.mpg)  
 : JPEG (.jpg)

#### Storage Capacity

120G SATA Hard drive

#### Video Output

VGA

#### Line Out

Stereo Phone jack

#### Playback Functions

Programmable playback : Loop, Auto and Program mode

#### Network

One RJ-45 port

#### External I/O Ports

RS-232 port  
 USB ports (USB Host for content update)

#### Power

Power input : 12V DC, 4A typical  
 Power consumption : 27W

#### Environmental

Operating temperature : 0°C to 50°C  
 Relative humidity : 5%-95% relative humidity,  
 (Non-condensing)

#### Dimension

Dimension (W x D x H) : 180mm x 235mm x 60mm

#### Weight

Weight (net) : 1.2kg

\* Suggested MPEG-2 encoding bitrate is 12Mb/s

Brand names belong to their respective owners. Specifications subject to change without notice. December 2008

### ASIA

Digital View Ltd.  
 16th floor Millennium City 3  
 370 Kwun Tong Road  
 Kwun Tong, Hong Kong  
 Tel: (852) 2861 3615  
 Fax: (852) 2520 2987  
 Email: hksales@digitalview.com

### USA

Digital View Inc.  
 18440 Technology Drive  
 Building 130  
 Morgan Hill, CA 95037  
 USA  
 Tel: (1) 408-782-7773  
 Fax: (1) 408-782-7883  
 Email: ussales@digitalview.com

### EUROPE

Digital View Ltd.  
 6 Marylebone Passage,  
 London, W1W 8EX,  
 UK  
 Tel: +44 20-7631-2150  
 Fax: +44 20-7631-2156  
 Email: uksales@digitalview.com

Please visit our web site for more information: [www.digitalview.com](http://www.digitalview.com)