



Platform

Platform Specifications

Key Features

- Sunlight Readable
- LVDS
- Long Lamp Life
- Thin and Light
- 8 CCFL



SLD1226 (TOSHIBA LTD121EC5S)

Model No.	SLD1226
LCD Display	12.1" TFT LCD Module
Display Area	245.76 x 184.32 mm
Brightness	1250 cd/m ²
Resolution	1024x768 (XGA)
Contrast Ratio	250 : 1
Pixel Pitch (mm)	0.24(H) x 0.24(V)
Viewing Angle	+70°~-70°(H), +55°~-70°(V)
Display Colors	262K colors
Response Time	50ms (Max)
Sync	LVDS
Power Consumption	37W
Inverter	LI 0812A
Control Board (Optional)	AD5621GA (Standard)
F / R Control Button	Power Switch, Menu, Select (+,-), Auto
OSD Menu	Brightness, Contrast, H/V Position, Color, Phase, Clock....
Dimensions (WxHxD)	338x278x59.3mm
Weight	3.59kgs
Optional	<input checked="" type="checkbox"/> AOT <input checked="" type="checkbox"/> Touch Screen

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.

Control Board (Optional)	AD5621GA/AD5621GD/AD5766GDVA/AD1501GDV
<input checked="" type="checkbox"/> AD5621GA	VGA+Audio
<input checked="" type="checkbox"/> AD5621GD	VGA+DVI
<input checked="" type="checkbox"/> AD5766GDVA	VGA+CVBS+S-Video+Audio (Optional DVI / Component)
F / R Control Button	5 Key / 4 Key (Optional)
<input checked="" type="checkbox"/> 5 Key	Power Switch, Menu, Select (+,-), Auto
<input checked="" type="checkbox"/> 4 Key	Power Switch, Menu, Select (+,-)

SLO= Open Frame
SLD= Industrial Casing




Platform Specifications



Platform

Outline Dimensions unit:mm

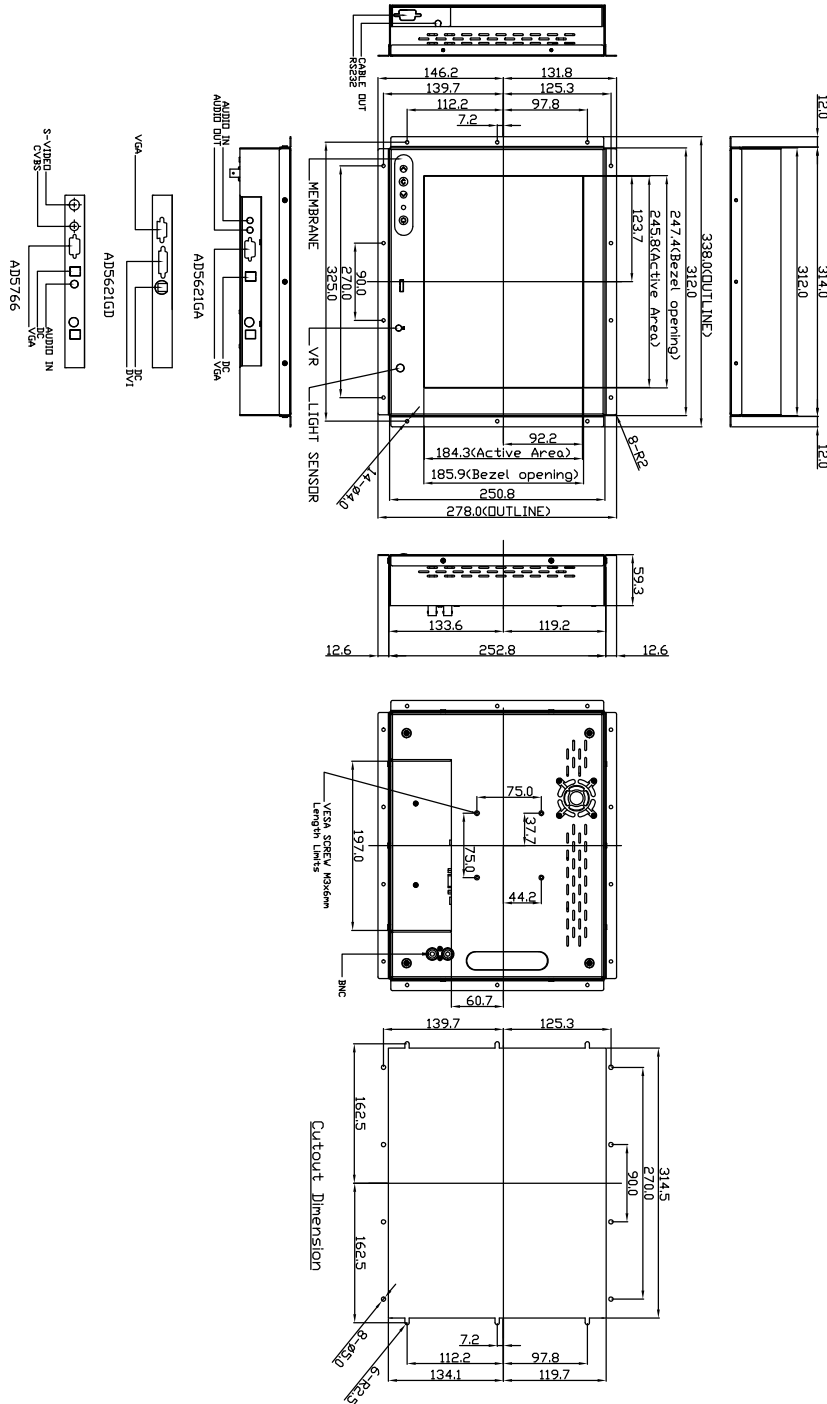

- Note:1. OSD membrane can be on front or rear cover.
 2. 4 different AD boards can be selectable.
 3. Light sensor and VR are optional function.
 4. Temper glass and touch screen can be installed.

Enrich your visual world....