




Platform

Platform Specifications

Key Features

- 1000 nits Sunlight Readable
- LED Backlight
- -20°C~60°C Wide Temp.
- Low Power Consumption
- High Shock & Vibration Resistance
- 90% High Uniformity
- Low EMI Noise
- Wide Dimming
- Multiple Mounting Choices
- 70000hrs Life Expectancy



SLO0615/ SLD0615 (PVIPO64VT4)

Model No.	SLO0615	SLD0615
LCD Display	6.4" LED Backlight LCD	6.4" LED Backlight LCD
Display Area	129.6 x 97.4 mm	129.6 x 97.4 mm
Brightness	1000 cd/m ²	1000 cd/m ²
Resolution	640 x 480 (VGA)	640 x 480 (VGA)
Contrast Ratio	400 : 1	400 : 1
Pixel Pitch (mm)	0.2025(H) x 0.203(V)	0.2025(H) x 0.203(V)
Viewing Angle	120°(H), 95°(V)	120°(H), 95°(V)
Display Colors	262K colors	262K colors
Response Time	40ms (Typical)	40ms (Typical)
Sync	TTL	TTL
Power Consumption	16W	16W
LED Driving Board	LI D06A	LI D06A
Control Board (Optional)	AD5621GA (Standard)	AD5621GA (Standard)
F / R Control Button	Power Switch, Menu, Select (+,-), Auto	
OSD Menu	Brightness, Contrast, H/V Position, Color, Phase, Clock....	
Dimensions (WxHxD)	200x165x47mm	219x152x48.2mm
Weight	1.34kgs	1.63kgs
Optional	<input checked="" type="checkbox"/> AOT <input checked="" type="checkbox"/> Touch Screen	

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.

Control Board (Optional)	AD5621GA/AD5621GD/AD5766GDVA
<input checked="" type="checkbox"/> AD5621GA	VGA+Audio
<input checked="" type="checkbox"/> AD5621GD	VGA+DVI
<input checked="" type="checkbox"/> AD5766GDVA	VGA+CVBS+S-Video+Audio (Optional DVI / Component)
F / R Control Button	5 Key / 4 Key (Optional)
<input checked="" type="checkbox"/> 5 Key	Power Switch, Menu, Select (+,-), Auto
<input checked="" type="checkbox"/> 4 Key	Power Switch, Menu, Select (+,-)

SLO= Open Frame
SLD= Industrial Casing






Platform

Platform Specifications

SLD0615 Outline Dimensions
unit:mm

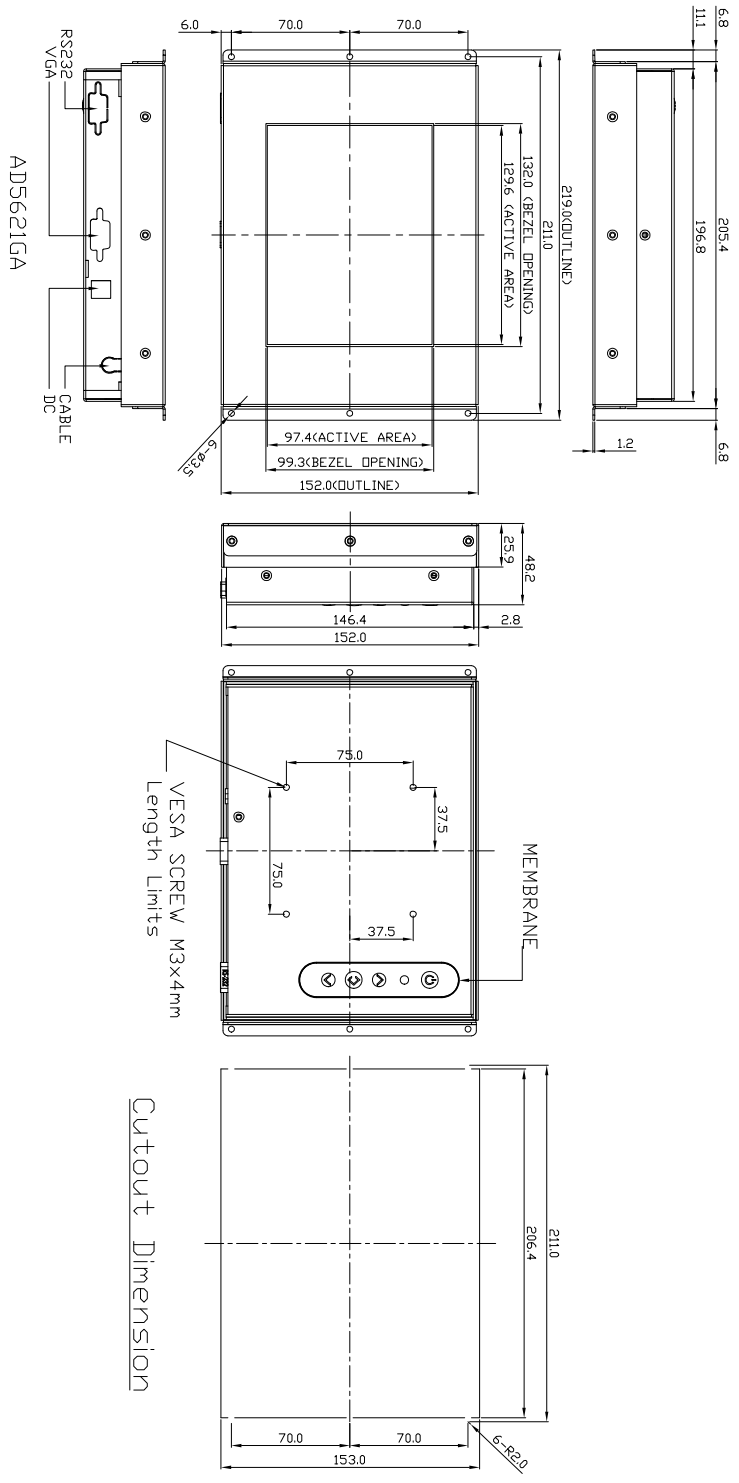

Enrich your visual world...