




Platform

Platform Specifications

Key Features

- Sunlight Readable
- LED Backlight
- -20°C~60°C Wide Temp.
- Low Power Consumption
- High Shock & Vibration Resistance
- 90% High Uniformity
- Low EMI Noise
- Wide Dimming
- Multiple Mounting Choices
- 70000hrs Life Expectancy



SLO/SLD1055 (CMO G104X1L01)

Model No.	SLO1055	SLD1055
LCD Display	10.4" LED Backlight LCD	10.4" LED Backlight LCD
Display Area	210.4 x 157.8mm	210.4 x 157.8mm
Brightness	800 cd/m ² (Max.1000 cd/m ²)	800 cd/m ² (Max.1000 cd/m ²)
Resolution	1024 x 768(XGA)	1024 x 768(XGA)
Contrast Ratio	1200 : 1	1200 : 1
Pixel Pitch (mm)	0.0685(H) x 0.2055(V)	0.0685(H) x 0.2055(V)
Viewing Angle	150°(H), 150°(V)	150°(H), 150°(V)
Display Colors	16.2M colors	16.2M colors
Response Time	40ms (Typical)	40ms (Typical)
Sync	LVDS x 1 Channel	LVDS x 1 Channel
Power Consumption	21.2W	21.2W
LED Driving Board	LI D12A	LI D12A
Control Board (Optional)	AD5621GA (Standard)	AD5621GA (Standard)
F / R Control Button	Power Switch, Menu, Select (+,-), Auto	
OSD Menu	Brightness, Contrast, H/V Position, Color, Phase, Clock....	
Dimensions (WxHxD)	324x254x50mm	399.9x228x54.2mm
Weight	2.2Kgs	2.72Kgs
Optional	<input checked="" type="checkbox"/> AOT <input checked="" type="checkbox"/> Touch Screen	

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.

Control Board (Optional)	AD5621GA/AD5621GD/AD5766GDVA
<input checked="" type="checkbox"/> AD5621GA	VGA+Audio
<input checked="" type="checkbox"/> AD5621GD	VGA+DVI
<input checked="" type="checkbox"/> AD5766GDVA	VGA+CVBS+S-Video+Audio (Optional DVI / Component)
F / R Control Button	5 Key / 4 Key (Optional)
<input checked="" type="checkbox"/> 5 Key	Power Switch, Menu, Select (+,-), Auto
<input checked="" type="checkbox"/> 4 Key	Power Switch, Menu, Select (+,-)


SLO= Open Frame
SLD= Industrial Casing





Platform Specifications

SLO1055 Outline Dimensions unit:mm

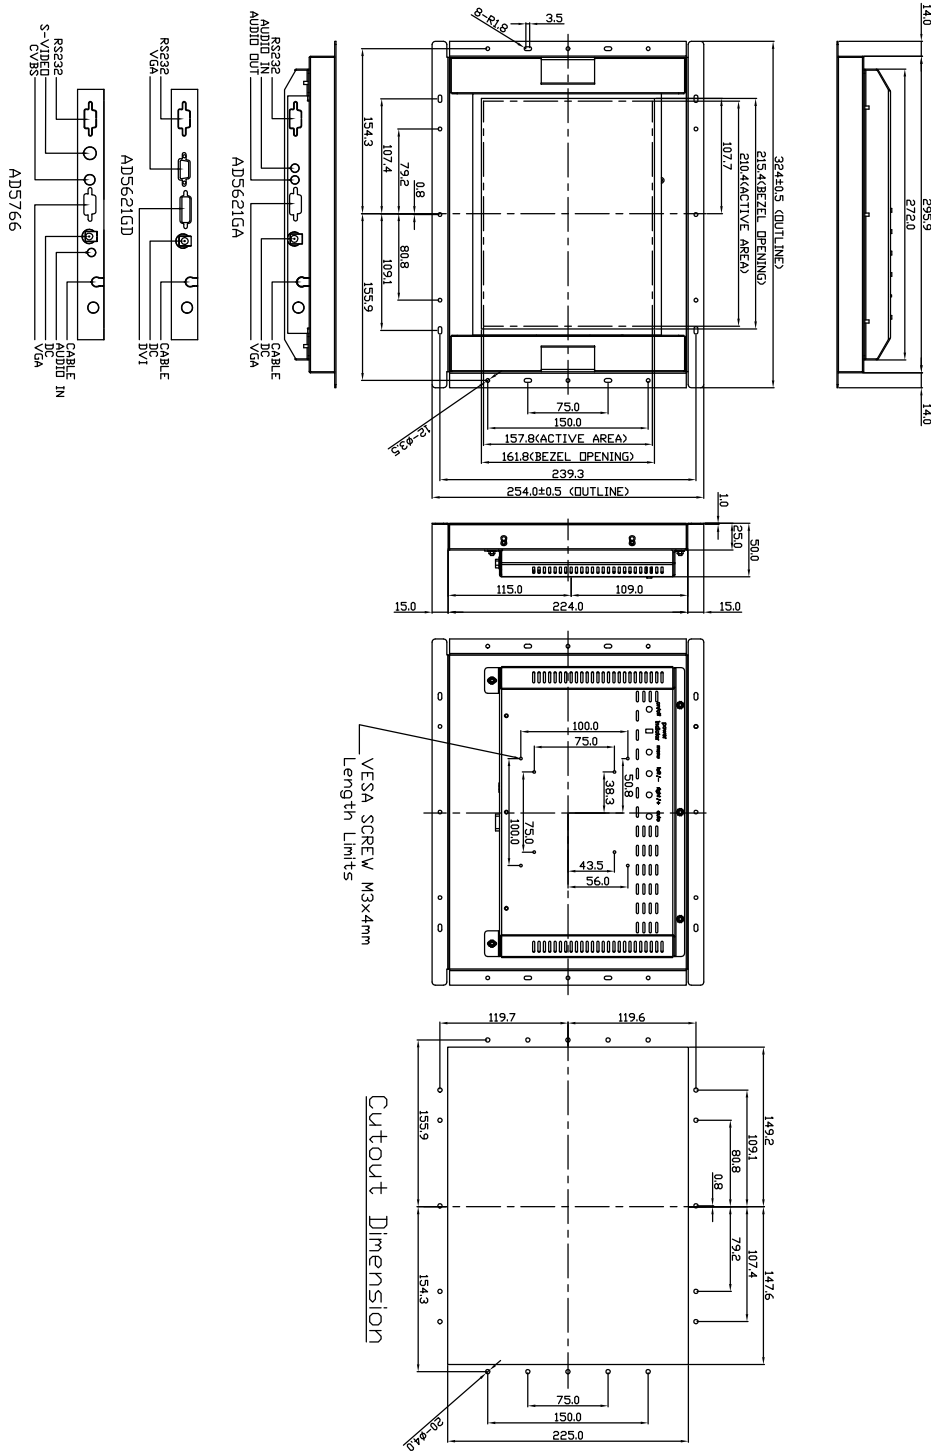

Note: 1.3 different AD boards can be selectable.
2. Tempered glass and touch screen can be installed.


Enrich your visual world....



Platform

Platform Specifications

SLD1055 Outline Dimensions unit:mm

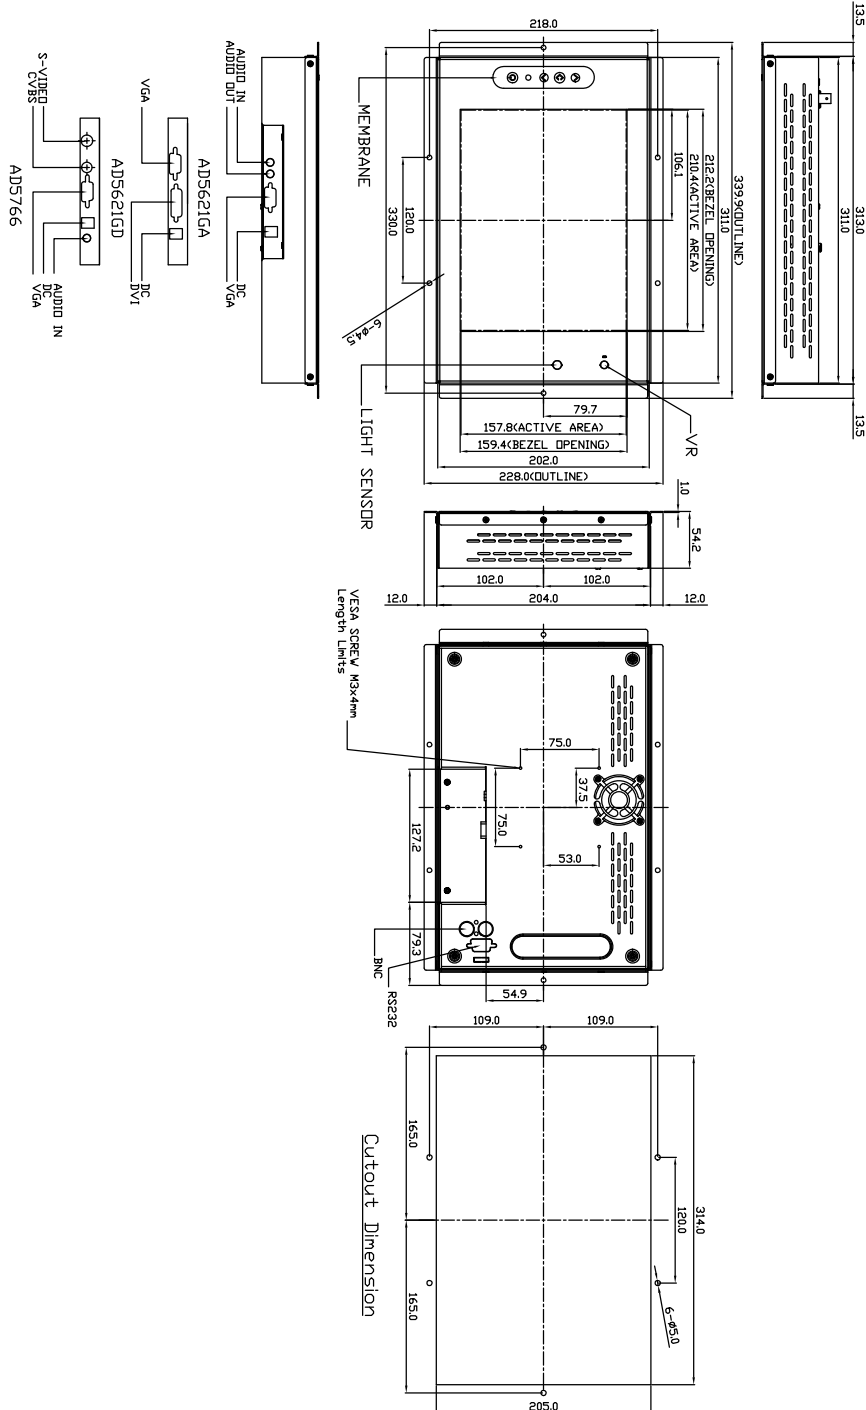

Note:1.DSD membrane can be on front or rear cover.
 2.4 different AD boards can be selectable.
 3.Light sensor and VR are optional function.
 4.Temper glass and touch screen can be installed.

Enrich your visual world....